

P19212.P01

# UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No.

P19212

Total Pages

Inventor(s) or Application Identifier  
Nobuhiro TANI

Title: THREE-DIMENSIONAL IMAGE CAPTURING DEVICE

(Only for new nonprovisional applications under 37 CFR 1.53(b))

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

## APPLICATION ELEMENTS

## ACCOMPANYING APPLICATION PARTS

1. ☒ Fee Transmittal Form
2. ☒ Specification [Total Pages 61]  
(preferred arrangement set forth below)  
- Descriptive title of the Invention  
- Cross References to Related Applications  
- Statement Regarding Fed sponsored R & D  
- Reference to Microfiche Appendix  
- Background of the Invention  
- Brief Summary of the Invention  
- Brief Description of the Drawings (if filed)  
- Detailed Description  
- Claim(s)  
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 23]
4. ☒ Oath or Declaration [Total Pages 3]  
a. ☒ Newly executed (original or copy) ☐ Unexecuted  
b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 18 completed)  
[Note Box 5 below]  
i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s)  
named in the prior application, see 37 CFR 1.63(d)(2)  
and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy  
of the oath or declaration is supplied under Box 4b, is considered  
as being part of the disclosure of the accompanying application  
and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)  
a. ☐ Computer Readable Copy  
b. ☐ Paper Copy (identical to computer copy)  
c. ☐ Statement verifying identity of above copies
8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure ☐ Copies of IDS Citations  
Statement (IDS)/PTO-1449
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application,  
Statement(s) Status still proper and desired
15. ☐ The prior application is assigned of record to \_\_\_\_\_
16. ☒ Foreign priority claimed  
a. ☒ Claim of Priority  
b. ☒ Certified Copies of Priority Document(s)
17. ☐ Other: \_\_\_\_\_

18. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No. \_\_\_\_\_/\_\_\_\_\_, filed \_\_\_\_\_.
19. ☐ Amend the specification by inserting before the first line the sentence:

This application is a \_\_\_ continuation-in-part, \_\_\_ continuation, \_\_\_ division, of Application No. \_\_\_\_\_/\_\_\_\_\_, filed \_\_\_\_\_.

Address all future correspondence to Customer No. 7055 at the present address of:

GREENBLUM &amp; BERNSTEIN, P.L.C.

1941 Roland Clarke Place  
Reston, VA 20191  
(703) 716-1191

6/8/00

Date


 Leslie J. Papernier  
Signature  
Reg. No. 33,329

Bruce H. Bernstein, Reg. No. 29,027

Typed or Printed Name

# THREE-DIMENSIONAL IMAGE CAPTURING DEVICE

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

5           The present invention relates to a three-dimensional image capturing device by which a three-dimensional shape of a measurement subject, which is to be measured, is captured by a time-of-flight measurement.

### 2. Description of the Related Art

10           A three-dimensional measurement using a three-dimensional image capturing device is classified as an active system, in which light, an electric wave or sound is radiated onto a measurement subject, and a passive system in which the light, electric wave or sound is not output. The active  
15 system comprises the time-of-flight measurement, a phase detection using a modulated light wave, a triangulation, a moiré topography, and so on, and the passive system comprises a stereo vision system, and so on.

          An active system device is bulky in comparison with that  
20 of the passive system, since the device requires a laser beam output mechanism. However, the active system device is superior regarding a distance measurement resolution, a measuring time, a measuring range and so on, and thus, despite the bulkiness, the device is utilized in various fields. In a three-dimensional  
25 image capturing device, described in "Measurement Science and

Technology" (S. Christie et al., vol.6, p.1301-1308, 1995), a pulse-modulated laser beam irradiates a measurement subject, and a reflected light beam, which is reflected by the measurement subject, is received by a two-dimensional CCD sensor to which  
5 an image intensifier is attached, so that an image signal, corresponding to the reflected light beam, is converted to an electric signal. ON-OFF control of the image intensifier is carried out by a gate pulse, which is synchronized with the pulse radiation of the laser beam. According to the device, since  
10 an amount of received light, based on the reflected light beam from the measurement subject, which is positioned far from the device, is less than that of received light based on a reflected light beam from a measurement subject, which is close to the measurement subject, an output corresponding to a distance  
15 between the measurement subject and the device can be obtained for each pixel of the CCD.

In a device disclosed in International Publication No. WO 97/01111, light, such as a laser beam, which is pulse-modulated, irradiates a measurement subject, and a reflected light beam,  
20 which is reflected by the measurement subject, is received by a two-dimensional CCD sensor which is assembled with a mechanical shutter or an electro-optical shutter formed by a liquid crystal display, so that an image signal corresponding to the reflected light beam is converted to an electric signal. The shutter is  
25 controlled at a timing which is different from that of the laser

beam, so that distance information of the measurement subject is obtained for each pixel of the CCD.

In the conventional three-dimensional image capturing device of an active system described above, an optical shutter, such as a KDP element, is provided so that an electric charge accumulating operation in the CCD sensor is controlled. However, not only is the optical shutter bulky, but also an electric circuit, which outputs a high voltage to drive the optical shutter, should be provided, and thus the conventional device becomes and remains bulky.

On the other hand, in USP No. 5,081,530, a device, in which an electronic shutter is provided for controlling an electric charge accumulating operation of a CCD sensor, is disclosed. However, an output of the CCD sensor, which is obtained by a single operation of the electronic shutter, is not great enough to sense distance information of the measurement subject.

#### SUMMARY OF THE INVENTION

Therefore, an object of the present invention is to provide, at a moderate price, a miniaturized three-dimensional image capturing device, which operates without an optical shutter, and by which an output sufficient to acquire three-dimensional distance information of the measurement subject is obtainable even when a high definition CCD is used so as to detect a high definition image of the subject.

Further another object of the present invention is to provide a three-dimensional image capturing device by which three-dimensional distance information of the high speed moving subject is detectable.

5           According to the present invention, there is provided a three-dimensional image capturing device, comprising a light source, a plurality of first and second photoelectric conversion elements, a first and a second electric charge holding units, a first and a second electric charge transfer processors and  
10 an electric charge integrating processor.

          The light source radiates a distance measuring light beam irradiating a measurement subject. The measurement subject reflects the distance measuring light beam to generate a reflected light beam. The first and second photoelectric conversion  
15 elements receive the reflected light beam, so that electric charge corresponding to an amount of the received reflected light beam is accumulated in each of the photoelectric conversion elements. The first and second electric charge holding units are disposed adjacent to each of the first and second photoelectric conversion  
20 elements, respectively. The first and second electric charge transfer processors transfer the electric charge accumulated in each of the first and second photoelectric conversion elements to each of the first and second electric charge holding units with first and second electrodes connected only to each of the  
25 first and second electric charge holding units respectively.

The electric charge integrating processor drives the first electric charge transfer processor repeatedly, so that electric charge accumulated in the first photoelectric conversion elements is integrated in the first electric charge holding unit.

5            Preferably, the device further comprises a first and second electric charge discharging processor. The first and second electric charges discharging processor discharges unwanted charge accumulated in each of the first and second photoelectric conversion elements, so that an accumulating  
10 operation of electric charge are started in each of the first and second photoelectric conversion elements. And the electric charge integrating processor is operated by driving the first electric charge discharging processor and the first electric charge transfer processor alternately.

15            Further, according to the present invention, there is provided a three-dimensional image capturing device, comprising a light source, a plurality of optical sensors, electric charge transfer electrodes, an electric charge transfer unit, an electric charge transfer electrode control processor and an  
20 electric charge accumulating processor.

The light source radiates a distance measuring light beam irradiating a measurement subject. The measurement subject reflects the distance measuring light beam to generate a reflected light beam. The optical sensors receive the reflected light  
25 beam, so that electric charge corresponding to an amount of the

received reflected light beam is generated in each of the optical sensors.

The plurality of optical sensors generates electric charge corresponding to an amount of light received by the optical sensors and is separated into predetermined groups. The electric charge transfer electrodes are applied to each of the optical sensors in order to transfer the electric charge generated in the optical sensors to the outside of the optical sensors. The electric charge transfer unit holds the electric charge transferred from the optical sensors by the electric charge transfer electrodes and transports the electric charge held in the electric charge transfer unit. The electric charge transfer electrode control processor controls each group of the electric charge transfer electrodes independently. The generated electric charge accumulating processor repeatedly drives the electric charge transfer electrode control processor and transfers electric charge generated in certain groups of the optical sensors, so that transferred electric charge accumulates in the electric charge transfer unit.

According to another aspect of the present invention, there is provide a three-dimensional image capturing device comprising a light source, a plurality of photoelectric conversion elements, a vertical transfer unit, a horizontal transfer unit, an electric charge transfer processor, an electric charge integrating processor and a transfer operation control

processor.

The light source radiates a distance measuring light beam irradiating a measurement subject, so that the measurement subject reflects the distance measuring light beam to generate  
5 a reflected light beam. The plurality of photoelectric conversion elements is disposed in a matrix arrangement and receives the reflected light beam, so that electric charge corresponding to an amount of the received reflected light beam is accumulated in each of the photoelectric conversion elements.

10 The vertical transfer unit is disposed along each vertical line of the photoelectric conversion elements, so that the electric charge accumulated in the photoelectric conversion elements is transferred in a vertical direction. The horizontal transfer unit is disposed nearby one end of the vertical transfer unit  
15 and in parallel with horizontal lines of the photoelectric conversion elements, so that the electric charge is transferred in a horizontal direction. The electric charge transfer processor can transfer electric charge accumulated only in photoelectric conversion elements that comprises in effective horizontal lines,  
20 which are disposed every predetermined number of lines in the horizontal lines. The electric charge integrating processor drives the electric charge transfer processor repeatedly and integrates the electric charge accumulated in the photoelectric conversion elements comprising the effective horizontal lines  
25 in the vertical transfer unit. The transfer operation control



processor controls the horizontal transfer unit and the vertical transfer unit, so that the horizontal transfer unit is driven only when the electric charge corresponding to the effective horizontal lines is transferred to the horizontal transfer unit.

5 Further, according to the present invention, there is provided a three-dimensional image capturing device comprising a light source, a plurality of photoelectric conversion elements, an electric charge transfer control processor, a distance calculating processor and a first and second distance measuring  
10 processor.

The light source radiates light irradiating a measurement subject. The plurality of photoelectric conversion elements is disposed in a matrix arrangement and can accumulate electric charge corresponding to an amount of light received by the  
15 photoelectric conversion elements. The electric charge transfer control processor controls an electric transfer operation, which outputs electric charge accumulated in the photoelectric conversion elements to the outside of the photoelectric conversion elements. The distance calculating  
20 processor calculates a distance, from the photoelectric conversion element to the measurement subject, from an amount of electric charge accumulated in the photoelectric conversion elements, from light reflected by the measurement subject and received in the photoelectric conversion elements. The first  
25 distance measuring processor drives the electric charge

transfer control processor in order to output electric charge accumulated in all the photoelectric conversion elements, and calculates distances corresponding to all the photoelectric conversion elements by means of the distance calculating processor. The second distance measuring processor drives the electric charge transfer control processor in order to output electric charge accumulated in certain partial photoelectric conversion elements, and calculates distances corresponding to the partial photoelectric conversion elements by means of the distance calculating processor.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The objects and advantages of the present invention will be better understood from the following description, with reference to the accompanying drawings in which:

- Fig. 1 is a perspective view showing a camera provided with a three-dimensional image capturing device of a first embodiment of the present invention;
- Fig. 2 is a block diagram showing an electrical construction of the camera shown in Fig. 1;
- Fig. 3 is a view showing a principle behind a distance measurement;
- Fig. 4 is a timing chart showing a distance measurement light beam, a reflected light beam, a gate pulse and a distribution of an amount of a light beam received by a CCD;
- Fig. 5 is a plan view showing a disposition of photo-diodes and a vertical transfer unit, which are provided in the CCD of the

first embodiment;

Fig. 6 is a sectioned elevational view of the CCD;

Fig. 7 is a timing chart of a distance information sensing operation by which data, corresponding to a distance from a camera  
5 body to each point on a surface of the measurement subject, is sensed;

Fig. 8 is a timing chart of a distance correction information sensing operation;

Fig. 9 is a timing chart of a reflectance information sensing  
10 operation;

Fig. 10 is a timing chart of a reflectance correction information sensing operation;

Figs. 11A and 11B show a flowchart of the distance information sensing operation of the first embodiment;

Fig. 12 is a diagram of an equivalent circuit of the vertical  
15 transfer electrodes in the CCD;

Fig. 13 shows a pulse signal input to the equivalent circuit shown in Fig. 12 and a signal output therefrom;

Fig. 14 is a timing chart of a distance information sensing  
20 operation regarding the time constant in the equivalent circuit of the vertical transfer electrodes;

Fig. 15 is a perspective view showing a camera provided with a three-dimensional image capturing device of a second embodiment of the present invention;

25 Fig. 16 is a plan view showing a disposition of photo-diodes

and a vertical transfer unit, which are provided in the CCD of the second embodiment.

Figs. 17A, 17B and 17C show a flowchart of the distance information sensing operation of the second embodiment;

5 Fig. 18 is a plan view showing a disposition of photo-diodes, a vertical transfer unit and a horizontal transfer unit;

Figs. 19A, 19B and 19C are timing charts of vertical transfer CCD pulse and horizontal transfer CCD pulse in the Dn mode, Dh1 mode and Dh2 mode, respectively;

10 Fig. 20 is a timing chart of a distance measurement operation executed in Dn mode, Dh1 mode and Dh2 mode, respectively.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is described below with reference to embodiments shown in the drawings.

15 Fig. 1 is an external view of an optical reader of a first embodiment of the present invention.

On a front surface of a camera body 10, a view-finder window 12 is provided toward a left-upper edge, adjacent to a photographing lens 11, and an electronic flash 13 is disposed  
20 toward a right-upper edge. On an upper surface of the camera body 10, a light emitting device (i.e., a light source) 14, which radiates a laser beam (an infrared laser beam, for example, being a distance measuring light beam) is mounted above the photographing lens 11. A release switch 15 and a liquid crystal  
25 display panel 16 are provided on a left side of the light emitting

device 14, and a mode change dial 17 and a V/D mode switch 18 are provided on a right side of the device 14. On a side surface of the camera body 10, a card slot 19 is formed, into which a recording medium, such as an IC memory card, is insertable, and  
5 a video output terminal 20 and an interface connector 21 are also provided.

Fig. 2 is a block diagram showing an electrical construction of the camera of Fig. 1.

An aperture 25 is provided in the photographing lens 11. The  
10 opening degree of the aperture 25 is adjusted by an iris drive circuit 26. A focusing operation and a zoom operation of the photographing lens 11 are controlled by a lens drive circuit 27.

An imaging device (CCD) 28 is disposed on an optical axis  
15 of the photographing lens 11. A subject image is formed on a light receiving surface of the CCD 28 through the photographing lens 11, and an electric charge corresponding to the subject image is generated therein. An operation, such as an accumulating operation and a reading operation of the electric  
20 charge of the CCD 28, is controlled by a CCD drive circuit 30. An electric charge signal, i.e., an image signal, read from the CCD 28 is amplified by an amplifier 31, and is converted from an analog signal to a digital signal by an A/D converter 32. The digital image signal is subjected to a process, such as a  
25 gamma correction, in the image signal process circuit 33, and

is stored as digital image data in an image memory 34. The iris drive circuit 26, the lens drive circuit 27, the CCD drive circuit 30 and the image signal process circuit 33 are controlled by a system control circuit 35.

5           The digital image data are read from the image memory 34, and supplied to an LCD drive circuit 36, which is operated in accordance with the digital image data, so that an image corresponding to the digital image data is indicated on an image indication LCD panel 37.

10           The digital image data read from the image memory 34 are also transmitted to a TV signal encoder 38, so that the digital image data can be transmitted to a peripheral monitor device 39, provided externally to the camera body 10, through a video output terminal 20. The system control circuit 35 is connected  
15 to an interface circuit 40, which in turn is connected to an interface connector 21. Therefore, the digital image data read from the image memory 34, can also be transmitted to a computer 41 connected to the interface connector 21. Further, the system control circuit 35 is connected to an image recording device  
20 43 through a recording medium control circuit 42. Therefore, the digital image data read from the image memory 34 can be recorded in a recording medium M, such as an IC memory card, mounted in the image recording device 43.

          A light emitting element control circuit 44 is connected  
25 to the system control circuit 35. The light emitting device

14 is provided with a light emitting element 14a and an illumination lens 14b, and an operation of the light emitting element 14a is controlled by the light emitting element control circuit 44. The light emitting element 14a radiates a laser beam, which is a distance measuring light beam, and which irradiates a whole of a measurement subject through the illumination lens 14b. The laser beam, reflected by the measurement subject, becomes incident on the photographing lens 11. By detecting the laser beam with the CCD 28 provided with a plurality of photo-diodes, which are two-dimensionally disposed on a surface thereof, a three-dimensional image is sensed, as described later.

The liquid crystal display panel 16 and a switch group 45, including the release switch 15, the mode change dial 17 and the V/D mode switch 18, are connected to the system control circuit 35.

With reference to Figs. 3 and 4, a principle behind a distance measurement in the embodiment is described below. Note, in Fig. 4, the abscissa indicates time "t".

A distance measuring light beam output by a distance measurement device B is reflected by a measurement subject S, and the reflected light beam is sensed by a CCD (not shown). The distance measuring light beam is a pulse, the width of which is "H". Accordingly, the reflected light beam is a pulse, the width of which is "H", similarly to the distance measuring light

beam. Therefore, a rise of the pulse of the reflected light beam occurs after a rise of the pulse of the distance measuring light beam by a time  $\delta \cdot t$  ( $\delta$  is a delay coefficient). Since the distance measuring light beam and the reflected light beam have both traveled a distance "r" between the distance measurement device B and the measured subject S, the distance "r" is represented as follows:

$$r = \delta \cdot t \cdot C / 2 \quad \dots (1)$$

wherein "C" is the speed of light.

For example, by setting a condition in such a manner that the reflected light beam can only be sensed from a rise of the pulse of the distance measuring light beam to a point prior to a fall of the pulse of the reflected light beam, i.e., by providing a gate pulse corresponding to a reflected light beam detecting period T, an amount "A" of received light from the reflected light beam becomes a function of the distance "r". Namely, the greater the distance "r" (or the greater the time  $\delta \cdot t$ ), the less the received light amount A.

In the embodiment, by taking advantage of the principle described above, the received light amount A is sensed using each of the photo-diodes (photoelectric conversion elements) of the CCD 28, the distance from the camera body 10 to each point on the surface of the measurement subject S is sensed, and data of the three-dimensional image, which indicates a topography of the measurement subject S, can be obtained concurrently.



Fig. 5 is a plan view showing a disposition of the photo-diodes  $51a_1$ ,  $51a_2$  (first and second photoelectric conversion elements) and a vertical transfer unit 52, which are provided in the CCD 28. Actually, a multitude of photo-diodes  $51a_1$  and  $51a_2$  are arranged in a matrix, and a corresponding vertical transfer unit 52 is disposed beside each vertical column of photo-diodes  $51a_1$  and  $51a_2$ . Fig. 6 is a sectioned elevational view of the CCD 28 in which the CCD 28 is cut by a plane perpendicular to a substrate 53. The CCD 28 is an interline CCD of vertical overflow drain (VOD) type, in which unwanted charge is discharged to the substrate 53.

The photo-diodes  $51a_1$ ,  $51a_2$  and the vertical transfer unit (electric charge holding unit) 52 are formed along a surface of the n-type substrate 53. As shown in Fig. 5, in the vertical direction of the CCD 28, the photo-diodes  $51a_1$  are arranged with three photo-diodes  $51a_2$  in between each of the photo-diodes  $51a_1$ , that is, the photo-diodes  $51a_1$  are disposed every fourth horizontal line of the CCD 28. The vertical transfer unit 52 is disposed adjacent to the each of photo-diodes  $51a_1$  and  $51a_2$ , parallel to rows extending in a vertical direction in Fig. 5 and is provided with a plurality of first and second electric charge holding units. Each of the first electric charge holding units comprises four vertical transfer electrodes  $52a_1$ ,  $52b_1$ ,  $52c_1$  and  $52d_1$ , which correspond to each of the photo-diodes  $51a_1$ . Similarly, each of the second electric charge holding units

comprises four vertical transfer electrodes  $52a_2$ ,  $52b_2$ ,  $52c_2$  and  $52d_2$ , which correspond to each of the photo-diodes  $51a_2$ . The vertical transfer electrodes that are indicated with same reference sign are mutually connected and the electric potential of those vertical transfer electrodes are kept the same. For example, all of the vertical transfer electrodes  $52a_2$  are connected together and every electrode  $52a_2$  have the same electric potential. Further, the vertical transfer electrodes  $52b_1$  and  $52b_2$  are connected together. Similarly, groups of the vertical transfer electrodes  $52c_1$ ,  $52c_2$  and of the vertical transfer electrodes  $52d_1$ ,  $52d_2$  are also mutually connected in each group. Namely, the vertical transfer electrodes provided in the vertical transfer units 52 of CCD 28 are classified into five groups of electrodes, that is, the group comprised of the electrodes  $52a_1$ , the group comprised of the electrodes  $52a_2$ , the group comprised of the electrodes  $52b_1$ ,  $52b_2$ , the group comprised of the electrodes  $52c_1$ ,  $52c_2$  and the group comprised of the electrodes  $52d_1$ ,  $52d_2$ . For each group of electrode, voltage signals can be applied independently. Namely, for example, voltage signal can be applied only to the electrodes indicated with the reference sign  $52a_1$  or the reference signs  $52b_1$  and  $52b_2$ , and not to the other electrodes. Therefore, in the vertical transfer unit 52, four potential wells can be formed, so that a signal charge is output from the CCD 28 by controlling a depth of the wells, as is well known. Note that a number of the vertical

transfer electrodes can be changed, depending upon the requirement of the CCD 28.

The photo-diodes (PD) 51a<sub>1</sub>, 51a<sub>2</sub> and the vertical transfer unit (V-CCD being electric charge holding unit) 52 are disposed in a p-type well formed on a surface of the substrate 53. The p-type well is completely depleted due to an inverse bias voltage applied between the p-type well and the n-type substrate 53. In this state, electric charge is accumulated in the photo-diodes 51a<sub>1</sub>, 51a<sub>2</sub>, and an amount of the electric charge corresponds to an amount of an incident light beam, which is the reflected light beam reflected by the measurement subject. When a substrate voltage is changed to a value greater than a predetermined value, electric charge accumulated in the photo-diodes 51a<sub>1</sub>, 51a<sub>2</sub> is discharged to the substrate 53. Conversely, when an electric charge transfer signal, which is a voltage signal, is applied to a transfer gate (TG) 54, the electric charge accumulated in the photo-diodes 51a<sub>1</sub>, 51a<sub>2</sub> is transferred to the vertical transfer unit 52. Namely, after the electric charge is discharged to the substrate 53 by the electric charge discharging signal, the signal charge accumulated in the photo-diodes 51a<sub>1</sub>, 51a<sub>2</sub> is transferred to the vertical transfer unit 52 by the electric charge transfer signal. By repeating the discharge and the transfer, an electronic shuttering operation is performed.

The CCD, in the present embodiment, is provided with the

photo-diodes 51a<sub>1</sub> comprising the vertical transfer electrodes 52a<sub>1</sub> and photo-diodes 51a<sub>2</sub> comprising the vertical transfer electrodes 52a<sub>2</sub>. However, only photo-diodes 51a<sub>1</sub> are used for detecting data that relates to the distance. As described later, 5 the reason why only photo-diodes 51a<sub>1</sub> are used for sensing the data relating to the distance is due to the difficulty that occurs during the distance information sensing operation when the number of pixels (the number of photo-diodes) is increased as to obtain a high definition image. On the other hand, the 10 image information sensing operation, which detects data relating to an image of the measuring subject, applies both the photo-diodes 51a<sub>1</sub> and 51a<sub>2</sub> in the operation.

Fig. 7 is a timing chart of a distance information sensing operation by which data, corresponding to the distance from the 15 camera body 10 to each point on a surface of the measurement subject, is sensed. The distance information sensing operation is described below with reference to Figs. 1, 2, 5, 6 and 7. Note that the timing chart of the distance information sensing operation in the present embodiment is slightly different from 20 the timing chart of the distance measurement principle, which was described above with reference to Fig. 4. Namely, the timing chart of the present embodiment is set so as to sense the reflected light beam from a point subsequent to the rise of the reflected light beam pulse to a point subsequent to the fall. By this 25 manner, a noise component due to an ambient daylight may be reduced,

though the principles of the above distance measurement means are basically the same.

In synchronization with an output of a vertical synchronizing signal (not shown), an electric charge discharging signal (a pulse signal) S1 is output, so that unwanted charge, which is accumulated in the photo-diodes 51a<sub>1</sub>, is discharged to the substrate 53. The electric charge value, while the pulse signal S1 is output, is indicated as S2 in the chart. After the electric charge discharging signal S1 is output, the light emitting device 14 is actuated, and thus a distance measuring light beam S3, which is a pulsed beam having a constant width T<sub>s</sub>, is output therefrom. A period for outputting the distance measuring light beam S3 or the width of the pulse beam is modulated according to a requirement. In the present embodiment, the distance measuring light beam S3 is modulated as to be completed approximately simultaneously with a completion of the output of the electric charge discharging signal S1.

The distance measuring light beam S3 is reflected by the measurement subject, and enters the CCD 28 as a reflected light beam S4. When the output of the electric charge discharging signal S1 ends, the electric charge for incident light, which comprises the reflected light beam S4 and an ambient daylight, starts on each of the photo-diodes and a signal charge S5 is sensed. When an incident of the reflected light beam S4 is completed, i.e. after the fall indicated with a reference sign

S6, the photo-diodes only generate signal charge S8 due to the ambient daylight.

An electric charge transfer signal (pulse signal) S9 is output only to the vertical transfer electrodes 52a<sub>1</sub>, and an electric charge accumulated in the photo-diodes 51a<sub>1</sub> are transferred to the vertical transfer unit 52. The operation of transferring the accumulated electric charge in the photo-diodes 51a<sub>1</sub> ends with the fall S10, which is a termination of the output of the electric charge transfer signal S9. Namely, a signal charge S11 of which electric signal accumulation was started just after the completion of the electric charge discharging signal output and terminated just after the completion of the output of the electric transfer signal S9, is transferred to the vertical transfer unit 52, while the photo-diodes continue to accumulate electric signals S14 due to the ambient daylight.

Thus during a period T<sub>U1</sub> from the end of the output of the electric charge discharging signal S1 to the end of the output of the electric charge transfer signal S9, a signal charge S11, corresponding to distances from the camera body 10 to the measurement subject and the ambient daylight is accumulated in the photo-diodes 51a<sub>1</sub>. Namely, the signal charge S12, a hatched portion of signal charge S11, corresponds to the distances from the camera body 10 to the measurement subject, while a residual portion S13 of the signal charge S11 results from the ambient

daylight.

When a predetermined time has elapsed since the output of the electric charge transfer signal S9, a subsequent electric charge discharge signal is output, so that the signal charge S14, an electric charge accumulated in the photo-diodes after the signal charge transfer to the vertical transfer unit 52, is discharged to the substrate 53. Subsequently, another signal charge is accumulated in the photo-diodes 51a<sub>1</sub>. Then, similarly to the above description, when the electric charge accumulation period T<sub>U1</sub> has again elapsed, the signal charge S11 is transferred to the vertical transfer unit 52.

The transferring operation of the signal charge S11 to the vertical transfer unit 52 is repeatedly performed until the next vertical synchronizing signal (not shown) is output. Thus, the signal charge S11 is integrated in the vertical transfer unit 52. The signal charge S11 integrated for one field period, which is between two vertical synchronizing signals, corresponds to distance information of the measurement subject, on condition that the measurement subject is stationary for the period between the two vertical synchronizing signals.

The detecting operation of the signal charge S11 described above is carried out in all of the photo-diodes 51a<sub>1</sub> provided in the CCD 28. As a result of the detecting operation for one field period, the distance information sensed by the photo-diodes 51a<sub>1</sub> is held in each corresponding vertical transfer unit 52a<sub>1</sub>,

which is located adjacent to each column of photo-diodes 51a<sub>1</sub>. The distance information is output from the CCD 28 by a vertical transferring operation of the vertical transfer units 52 and a horizontal transferring operation of a horizontal transfer unit (not shown). The distance information is then output from the CCD 28, as a three-dimensional image data of the measured subject.

The reflected light beam detected by the CCD 28 is affected by the reflectance of the surface of the subject. Therefore, the distance information obtained through the reflected light beam contains error derived from the reflectance. Further, the light beam sensed by the CCD 28 may contain an extra component, such as ambient daylight, being other than the reflected light beam from the measurement subject, which can cause an error.

With reference to Fig. 1, Fig. 2, Fig. 7 to Fig. 11B, methods of correcting such errors are explained as a part of the distance information sensing operation, performed in the present embodiment. Fig. 8, Fig. 9 and Fig. 10 are timing charts of a distance correction information sensing operation, a reflectance information sensing operation and a reflectance correction information sensing operation, respectively. Fig. 11A and Fig. 11B are a flowchart of the distance information sensing operation.

When it is recognized in Step 101 that the release switch 15 is fully depressed, Step 102 is executed in which it is



determined which mode is selected, a video (V) mode or a distance measurement (D) mode. A change between the modes is carried out by manually operating the V/D mode switch 18.

When the D mode is selected, Step 103 is executed in which  
5 the vertical synchronizing signal is output and a distance measuring light beam control is started. Namely, the light emitting device 14 is driven so that the distance measuring light beam S3 is intermittently output as a pulsed beam. Then, Step 104 is executed so that a sensing operation control of the CCD  
10 28 is started. Namely, the distance information sensing operation described with reference to Fig. 7 is started, and thus the electric charge discharging signal S1 and the electric charge transfer signal S9 are alternately output, so that the signal charge S11 of the distance information is integrated in  
15 the vertical transfer unit 52.

In Step 105, it is determined whether one field period has elapsed since the beginning of the distance information sensing operation, i.e., whether a new vertical synchronizing signal has been output. When one field period has passed, the  
20 process goes to Step 106 in which the signal charge S11 of the distance information is output from the CCD 28. The signal charge S11 is then temporally stored in the image memory 34 in Step 107. Then, in Step 108, the distance measuring light beam control is turned OFF, and thus the light emitting operation of the light  
25 emitting device 14 is terminated.

In Steps 109 through 112, the distance correction information sensing operation is performed. In Step 109, a vertical synchronizing signal is output, and a sensing operation control of the CCD 28 is started. Namely, as shown in Fig. 8, an electric charge discharging signal S21 and an electric charge transfer signal S22 are alternately output while the light emitting operation of the light emitting device 14 is not carried out, i.e., while the light source is not illuminated. Although the electric charge accumulation period  $T_{U1}$  is the same as that of the distance information sensing operation shown in Fig. 7, the distance measuring light beam does not irradiate the measurement subject (reference S23), and thus there is no reflected light beam (reference S24). Therefore, although a signal charge of the distance information is not generated, a signal charge S25 corresponding to an interference or noise component is generated, since the noise component, such as ambient daylight, enters the CCD 28. When an electric charge transfer signal S22 is output, a signal charge S26, a charge accumulated during the electric charge accumulation period  $T_{U1}$ , is transferred to the vertical transfer unit 52. The signal charge S26 corresponds to distance correction information, which is used for correcting an error generated in the distance information due to the noise component, and is related to the electric charge accumulation period  $T_{U1}$ .

In Step 110, it is determined whether one field period

has elapsed since the beginning of the distance correction information sensing operation, i.e., whether a new vertical synchronizing signal has been output. When one field period has passed, the process goes to Step 111 in which the signal charge S26 of the distance correction information is output from the CCD 28. The signal charge S26 is then temporarily stored in the image memory 34 in Step 112.

In Steps 113 through 117, the reflectance information sensing operation is performed. In Step 113, a vertical synchronizing signal is output, and a distance measuring light beam control of the CCD 28 is started. Namely, as shown in Fig.9, a distance measuring light beam S33 is intermittently output as a pulsed beam. In Step 114, a sensing operation control of the CCD 28 is started, and thus an electric charge discharging signal S31 and an electric charge transfer signal S35 are alternately output. The electric charge of photo-diodes is discharged (reference S32) as the electric charge discharge signal S31 is output. After completion of an output of the electric charge discharge signal S31, a distance measurement light beam S33 is emitted from the light emitting device 14, and a reflected light beam S34 is made incident on the CCD 28. An electric charge transfer signal S35 is output after a period sufficient to detect all of the reflected light beam S34. Namely, the reflectance information sensing operation is controlled in such a manner that all of the reflected light beam

S34 is received within an electric charge accumulation period  $T_{u2}$ , which is from an end of an output of the electric charge discharging signal S31 to an end of an output of the electric charge transfer signal S35. Note that, a width  $T_s$  of the signal charge S33 accumulated in each of the photo-diodes 51a<sub>1</sub> of the CCD 28 is the same as a width  $T_s$  of the distance measuring light beam S33.

During a period in which all of the reflected light beam S34 is sensed, a signal charge S36 accumulated in the photo-diodes 51a<sub>1</sub> is due to the reflected light beam S34 and the ambient daylight. The signal charges S37 and S38 are charges generated only by the ambient daylight. When the electric charge transfer signal S35 is output, the signal charge S39 is transferred to the vertical transfer unit 52.

Therefore, the signal charge, which is detected during the electric charge accumulation period  $T_{u2}$ , including the signal charge S'39 generated by the ambient daylight, does not depend upon the distance of the measurement subject, and corresponds to the reflectance information which depends on the reflectance of the surface of the measurement subject.

In Step 115, it is determined whether one field period has elapsed since the beginning of the reflectance information sensing operation, i.e., whether a new vertical synchronizing signal has been output. When one field period has passed, the process goes to Step 116 in which the signal charge S39 of the

reflectance information is output from the CCD 28. The signal charge S39 is then temporarily stored in the image memory 34 in Step 117. Then, in Step 118, the distance measuring light beam control is turned OFF, and thus the light emitting operation  
5 of the light emitting device 14 is terminated.

In Steps 119 through 122, the reflectance correction information sensing operation is performed. In Step 119, a vertical synchronizing signal is output, and a sensing operation control of the CCD 28 is started. Namely, as shown in Fig. 10,  
10 an electric charge discharging signal S41 and an electric charge transfer signal S42 are alternately output while the light emitting operation of the light emitting device 14 is not carried out. Although the electric charge accumulation period  $T_{U2}$  is the same as that of the reflectance information sensing operation  
15 shown in Fig. 9, the distance measuring light beam does not irradiate the measurement subject (reference S43), and thus there is no reflected light beam (reference S44). Therefore, although a signal charge of the reflectance information is not generated, a signal charge S46 corresponding to an interference component  
20 or a noise component is generated, since the noise component, such as ambient daylight, enters the CCD 28. A signal charge S47 is a charge accumulated during the electric charge accumulation period  $T_{U2}$  and is transferred to the vertical transfer unit 52 by the electric charge transfer signal S42.  
25 The signal charge S47 corresponds only to reflectance correction

information, which is used for correcting an error generated in the reflectance information due to the noise component, and is related to the electric charge accumulation period  $T_{U2}$ .

In Step 120, it is determined whether one field period has elapsed since the beginning of the reflectance correction information sensing operation, i.e., whether a new vertical synchronizing signal has been output. When one field period has passed, the process goes to Step 121 in which the signal charge S46 of the reflectance correction information is output from the CCD 28. The signal charge S47 is temporarily stored in the image memory 34 in Step 122.

In Step 123, a calculation process of the distance measurement (D) data is performed using the distance information, the distance correction information, the reflectance information and the reflectance correction information, which are obtained in Steps 103 through 122. The D data is output in Step 124, and the sensing operation ends. Conversely, when it is determined in Step 102 that the V mode is selected, the distance measuring light beam control is turned OFF in Step 125, and a normal photographing operation (i.e., CCD video control) using all photo-diodes 51a<sub>1</sub>, 51a<sub>2</sub> of the CCD 28 is turned ON. Then, the sensing operation ends.

With reference to Figs. 7 through 10, the contents of the calculation executed in Step 123 is described below.

It is supposed that the measurement subject of reflectance

R is illuminated and an image of the measurement subject is formed on the CCD 28 while considering that the measurement subject to be a two-dimensional light source. At this time, an output  $S_n$ , which is obtained by integrating an electric charge generated in a photo-diode for an electric charge accumulation period "t", is indicated as follows:

$$S_n = k \cdot R \cdot I \cdot t \quad \dots (2)$$

wherein "k" is a proportional coefficient, which is varied in accordance with an F-number and a magnification of the photographing lens.

When the measurement subject is illuminated by light output from a light source, such as an infrared laser source, the luminance I is obtained by combining a luminance  $I_s$ , due to the light source and a luminance  $I_B$  due to the ambient light, which is indicated as follows:

$$I = I_s + I_B \quad \dots (3)$$

As shown in Fig. 7, it is supposed that the electric charge accumulation period is  $T_{U1}$ , the pulse width of the distance measuring light beam S3 is  $T_s$ , a pulse width of the signal charge S5 or S12 of the distance information is  $T_D$ , and the electric charge accumulation period is repeated N times for one field period. An output  $SM_{10}$  of the CCD is:

$$\begin{aligned} SM_{10} &= \sum (k \cdot R (I_s \cdot T_D + I_B \cdot T_{U1})) \\ &= k \cdot N \cdot R (I_s \cdot T_D + I_B \cdot T_{U1}) \quad \dots (4) \end{aligned}$$

wherein the pulse width  $T_D$  is indicated as follows:

$$\begin{aligned}
T_D &= \delta \cdot t \\
&= 2r/C \quad \dots (5)
\end{aligned}$$

As shown in Fig. 9, when the electric charge accumulation period  $T_{U2}$  is greater than the pulse width  $T_s$ , such that the electric charge accumulation period  $T_{U2}$  is large enough to receive the whole of the reflected light beam, an output  $SM_{20}$  of the CCD is:

$$\begin{aligned}
SM_{20} &= \sum (k \cdot R (I_s \cdot T_s + I_B \cdot T_{U2})) \\
&= k \cdot N \cdot R (I_s \cdot T_s + I_B \cdot T_{U2}) \quad \dots (6)
\end{aligned}$$

As shown in Fig. 8, when the light beam is turned OFF to carry out a pulse-shaped electric charge accumulation, having a same width as that of Fig. 7, an output  $SM_{11}$  of the CCD is:

$$\begin{aligned}
SM_{11} &= \sum (k \cdot R \cdot I_B \cdot T_{U1}) \\
&= k \cdot N \cdot R \cdot I_B \cdot T_{U1} \quad \dots (7)
\end{aligned}$$

Similarly, an output  $S_{11}$  of the CCD, which is obtained when an electric charge accumulation shown in Fig. 10 is performed, is

$$\begin{aligned}
SM_{21} &= \sum (k \cdot R \cdot I_B \cdot T_{U2}) \\
&= k \cdot N \cdot R \cdot I_B \cdot T_{U2} \quad \dots (8)
\end{aligned}$$

Based on the formulas (4), (6), (7) and (8), a following formula is obtained:

$$\begin{aligned}
S_D &= (SM_{10} - SM_{11}) / (SM_{20} - SM_{21}) \\
&= T_D / T_s \quad \dots (9)
\end{aligned}$$

As described above, the distance measuring light beam S3 and the reflected light beam S4 contain noise, such as ambient daylight (i.e., a luminance  $I_B$  due to ambient daylight).  $T_D/T_s$  included in the formula (9) indicates that an amount of the



reflected light beam S4 from the measurement subject, when the distance measuring light beam S3 is radiated, is normalized by an amount of the distance measuring light beam S3, and is equal to a ratio of a value in which the noise component ( $SM_{11}$ ) (corresponding to the electric charge S26 shown in Fig. 8) is subtracted from the amount of the distance measuring light beam S3 ( $SM_{10}$ ) (corresponding to the signal charge S11 shown in Fig. 7), to a value in which the noise component ( $SM_{21}$ ) (corresponding to the electric charge S47 shown in Fig. 10) is subtracted from an amount of the reflected light beam S4 ( $SM_{20}$ ) (corresponding to the signal charge S39 shown in Fig. 9).

$SM_{10}$ ,  $SM_{11}$ ,  $SM_{20}$  and  $SM_{21}$  included in the formula (9) are stored as the distance information, the distance correction information, the reflectance information and the reflectance correction information, in Steps 107, 112, 117 and 122, respectively. Therefore, based on the information,  $T_D/T_S$  is obtained. Since the pulse width  $T_S$  is known, the distance  $r$  is obtained from formula (5) and  $T_D/T_S$ .

Thus, based on the formulas (5) and (9), the distances  $r$  from the camera body to each point on the surface of the measurement subject is corrected, so that an accuracy of a distance sensing is improved.

With reference to Fig. 6 and Fig. 12 through Fig. 14, a problem that occurs when a CCD for sensing a high definition image, in which the number of pixels exceeds a mega pixel, is

used for a distance information sensing operation is explained in the following.

Each of the vertical transfer electrodes in the CCD circuit has a stray capacitance  $C_p$ , respectively. The stray capacitance  $C_p$  is schematically shown in Fig. 6. A total stray capacitance for a group of the vertical transfer electrodes that are indicated with a same reference number is the result of a sum of the each stray capacitance  $C_p$  of the electrodes in the group. Fig. 12 is a diagram of equivalent circuit for a group of electrodes indicated with a same reference number.  $C$  is the total stray capacitance of the electrodes of which reference numbers are identical and  $R$  is a total resistance of the same.  $A_{in}$  and  $A_{out}$  are input and output signals of the equivalent circuit.

In Fig. 13, an input signal  $A_{in}$  of rectangular pulse, which is input to the equivalent circuit, and an output signal  $A_{out}$ , which is output from the equivalent circuit in response to the input signal  $A_{in}$ , are shown. Each of the signals shown in the figure is regularized by the maximum value of each. When the input signal  $A_{in}$  of the rectangular pulse is input to the CCD circuit, the rise and fall of the output signal  $A_{out}$ , which emerge as an applied voltage to the vertical transfer electrodes, is deformed by the total stray capacitance  $C$  and the total resistance  $R$  of the circuit. The deformation of the output pulse or output signal  $A_{out}$  is characterized by a time constant  $t_1 (= CR)$  of the circuit. If the number of pixels (photo-diodes) in

the CCD is increased to obtain a high definition image, the number of vertical transfer electrodes inevitably increases, thus an amount of the total stray capacitance  $C$  (sum of  $C_p$ ) increases. Consequently, the time constant  $t_1$  is increased and  
5 the rise time and the fall time of the output signal  $A_{out}$  are extended.

For example, when all of the photo-diodes  $51a_1$ ,  $51a_2$  in the CCD are used in the distance information sensing operation under the condition in which the amount of the total stray  
10 capacitance  $C$  and resistance  $R$  for the circuit that comprises all the vertical transfer electrodes  $52a_1$ ,  $52a_2$  of the CCD, are respectively  $3nF$  ( $3,000pF$ ) and  $50\Omega$ , the time constant  $t_1$  of the circuit becomes  $150ns$ . However, when only the photo-diodes  $51a_1$  are used in the distance information sensing operation, amounts  
15 of the total stray capacitance  $C$  and resistance  $R$  are respectively reduced to  $750pF$  and  $70\Omega$ , since the photo-diodes  $51a_1$ , as shown in Fig. 5, are provided on every fourth line of the CCD and the number of the horizontal lines used in the distance information sensing operation is thinned out to one fourth of the entire  
20 horizontal lines of the CCD, that is, the one fourth of the entire electrodes  $52a_1$  and  $52a_2$  are used. Consequently, the time constant  $t_1$  is reduced to  $52.5ns$ . Fig. 14, as well as Fig. 7, is a timing chart of the distance information sensing operation. However, Fig. 14 shows timing of the electric charge transfer  
25 signal when the time constant  $t_1$  is  $150ns$  and  $52.5ns$ . The electric

charge transfer signal S61, shown in a solid line, corresponds to the case in which the photo-diodes 51a<sub>1</sub> are only used in the distance information sensing operation and the time constant  $t_1$  is 52.5ns. On the other hand, the electric charge transfer signal S62, shown in a broken line, is an electric charge transfer signal when the entire photo-diodes 51a<sub>1</sub>, 51a<sub>2</sub> are used and the time constant  $t_1$  is 150ns. Furthermore, the signal charge S63 shown in a solid line and the signal charge S64 shown in a broken line, which are transferred to the vertical transfer unit 52, correspond to the electric charge transfer signal S61 and S62, respectively.

In the present embodiment, a transmission of a signal charge to the vertical transfer unit 52 from the photo-diodes 51a<sub>1</sub> or 51a<sub>2</sub> begins with the rise of the electric charge transfer signal and ends with the fall of the same. The fall of the electric charge transfer signal S61 declines more rapidly than that of the electric charge transfer signal S62. Therefore less of the signal charge due to the ambient daylight is transferred to the vertical transfer unit 52 when the transmission is executed by the electric transfer signal S61 instead of the electric transfer signal S62. A decrease in the amount of signal charge due to the ambient daylight is indicated with a hatched portion S65. Consequently, as for the signal charge transferred to the vertical transfer unit 52, a signal charge component S66, which corresponds to the distance information, relatively increases

while the signal charge component corresponding to the ambient daylight or noise decreases. Thus the noise component included in the distance information decreases and the accuracy of the distance information sensing operation improves. Further, as  
5 the time for transporting the signal charge from the photo-diodes to the vertical transfer unit decreases, the number of times for integrating the signal charge during one field period can be increased as to obtain a higher level of the signal output.

As described above, according to the first embodiment,  
10 even though a high definition CCD is used, an optical shutter need not be provided since an output sufficient to acquire distance information to the measurement subject is obtainable, thus the three-dimensional image capturing apparatus can be miniaturized and manufactured at a low cost.

15 Further, according to the first embodiment, the distance information, which is three-dimensional image data regarding the topography of the measurement subject, is detected and accumulated concurrently without a need for scanning the distance measuring light beam over the measurement subject. Accordingly,  
20 a time over which the three-dimensional image of the measurement subject is obtained can be drastically shortened.

Note that, in the first embodiment, an influence derived from noise, such as ambient daylight, is removed from the distance information of the measurement subject. Nevertheless, in a case  
25 where the influence can be neglected, the values of the signal



mode is further separated into normal mode (Dn mode: first distance information sensing means), a first high-speed mode (Dh1 mode: second distance information sensing means) and a second high-speed mode (Dh2 mode: third distance information sensing means). As a result, V/D mode switch 18' has four selective positions corresponding to each of the above three modes and V mode. The details of the Dn mode, Dh1 mode and Dh2 mode are given later.

In the second embodiment, the CCD 28, for example, is composed of photo-diodes 51a<sub>1</sub>, 51a<sub>2</sub> and 51a<sub>3</sub>, which are electrically separated into three groups. Fig. 16 shows a plan view of a disposition of the photo-diodes 51a<sub>1</sub>, 51a<sub>2</sub>, 51a<sub>3</sub> and the vertical transfer unit 52, which are provided in the CCD 28.

Similar to the first embodiment, the photo-diodes 51a<sub>1</sub>, 51a<sub>2</sub>, 51a<sub>3</sub> and the vertical transfer unit 52 are disposed along a surface of the n-type substrate 53 (refer Fig. 6). The photo-diodes 51a<sub>1</sub>, 51a<sub>2</sub> and 51a<sub>3</sub> are arranged in a matrix, although in the figure only one vertical line or column of the photo-diodes is shown. The photo-diodes are downwardly arranged in an order of 51a<sub>1</sub>, 51a<sub>2</sub>, 51a<sub>2</sub>, 51a<sub>3</sub>, 51a<sub>2</sub>, 51a<sub>2</sub> and they are repeatedly arranged in this order.

The vertical transfer unit 52 is disposed beside each vertical column of photo-diodes. The vertical transfer unit 52 has four vertical transfer electrodes for each photo-diode.

Namely, the vertical transfer unit 52 beside the photo-diodes 51a<sub>1</sub> has vertical transfer electrodes 52a<sub>1</sub>, 52b, 52c and 52d. Similarly, the vertical transfer unit 52 beside the photo-diodes 51a<sub>2</sub> and 51a<sub>3</sub> has vertical transfer electrodes 52a<sub>2</sub>, 52b, 52c, 52d and vertical transfer electrodes 52a<sub>3</sub>, 52b, 52c, 52d, respectively. Vertical transfer electrodes indicated with the same reference number are electrically connected together in the circuit and a voltage signal can be independently applied to each group of electrodes that are indicated with the same reference number. Signal charges accumulated in a photo-diode are integrated in the vertical transfer unit 52 by the same method described in the first embodiment and an electronic shuttering operation is performed.

In the second embodiment, the photo-diodes of the CCD are separated into three groups of the photo-diodes 51a<sub>1</sub>, 51a<sub>2</sub> and 51a<sub>3</sub>. This separation is for sensing three-dimensional distance information of a moving subject. When a subject is moving, a detecting period for sensing distance information needs to be shortened. As described latter, this shortening is achieved by using 1/N (e.g. N=1,2,3) horizontal lines of photo-diodes of the CCD in the sensing operation of distance information. In the second embodiment, as mentioned above, D mode has three selective modes, which are D<sub>n</sub> mode, D<sub>h1</sub> mode and D<sub>h2</sub> mode. D<sub>n</sub> mode is a mode that detects distance information of the measurement subject when the subject can be regarded as



stationary during the period of sensing the distance information,  
and it uses all three groups of the photo-diodes, 51a<sub>1</sub>, 51a<sub>2</sub> and  
51a<sub>3</sub>, for detecting the distance information. Namely, all  
horizontal lines comprising photo-diodes 51a<sub>1</sub>, 51a<sub>2</sub> or 51a<sub>3</sub> are  
5 effective horizontal lines. Dh1 mode and Dh2 mode are modes  
to detect distance information of the subject when the subject  
is moving. Dh1 mode uses two groups of the photo-diodes, 51a<sub>1</sub>  
and 51a<sub>3</sub>, for sensing the distance information and Dh2 mode uses  
one group of the photo-diodes, 51a<sub>1</sub>, for the same. Namely, in  
10 Dh1 mode, horizontal lines comprising photo-diodes 51a<sub>1</sub> or 51a<sub>3</sub>  
are effective horizontal lines, and in Dh2 mode, horizontal  
lines comprising photo-diodes 51a<sub>1</sub> are the effective horizontal  
lines. Dh2 mode is for sensing the distance information of a  
fast moving subject while Dh1 mode is for a relatively slower  
15 moving subject. Namely, each of Dn mode, Dh1 mode and Dh2 mode  
corresponds to distance information sensing operations which  
are carried out with the photo-diodes of the CCD thinned out  
to 1/1, 1/3 and 1/6 of the horizontal lines in the CCD,  
respectively.

20 Fig. 17A to Fig. 17C are a flow chart of the distance  
information sensing operation and image information sensing  
operation in the second embodiment.

When it is determined at step 201 that the release switch  
15 is fully depressed, Step 202 is executed to determine which  
25 of the video (V) mode or distance-measurement (D) mode is selected.

A change between V mode and D mode is carried out by manually operating the V/D mode switch 18'. When the V/D mode switch 18' is set to one of the Dn mode, Dh1 mode or Dh2 mode, it is determined as D mode.

- 5           When it is determined in Step 202 that D mode is selected, in Step 203 through Step 207, it is then determined which of the D modes is selected, Dn mode, Dh1 mode or Dh2 mode, and preparations for a selected mode are carried out. Namely, in Step 203, it is determined whether a selected mode is Dn mode.
- 10   When Dn mode is selected, in Step 204 a preparation for the distance information sensing operation is made, so as to execute the operation without thinning out any of the photo-diodes in the CCD, or in other words, using all the photo-diodes 51a<sub>1</sub>, 51a<sub>2</sub> and 51a<sub>3</sub>. When it is determined in Step 203 that a selected mode
- 15   is not Dn mode, it is then determined whether Dh1 mode is selected. If Dh1 mode is selected, in Step 206, a preparation for the distance information sensing operation is made so as to execute the operation merely with the photo-diodes 51a<sub>1</sub> and 51a<sub>3</sub>, which results in the photo-diodes of the CCD being thinned out to 1/3
- 20   of the horizontal lines of the CCD. Conversely, when it is determined in Step 205 that Dh1 mode is not selected, a preparation for the distance information sensing operation is made in Step 207, so as to execute the operation merely with the photo-diodes 51a<sub>1</sub>, which results in the photo-diodes of the CCD being thinned
- 25   out to 1/6 of the horizontal lines of the CCD.

Processes in Step 230 and Step 231 are identical to those of Step 125 and Step 126 in the first embodiment. Further, process from Step 208 through Step 229 are similar to the steps from Step 103 through Step 124 in the first embodiment. The process  
5 differs in that the photo-diodes used in the distance information sensing operation are selected according to the above selected mode and operations of signal charge output from the CCD 28, which is executed in step 211, 216, 221 and 226.

The signal charge output operations, a vertical and  
10 horizontal transfer of the signal charge, executed in step 211, 216, 221 and 226 are explained with reference to Fig. 18 to Fig. 22.

Fig. 18 shows a disposition of the vertical transfer unit 52, the horizontal transfer unit 55 and photo-diodes 51a<sub>1</sub>, 51a<sub>2</sub>  
15 and 51a<sub>3</sub>. However, only one vertical column of the vertical transfer unit 52 and the photo-diodes 51a<sub>1</sub>, 51a<sub>2</sub> and 51a<sub>3</sub> are shown. A configuration of the vertical transfer unit and the photo-diodes is the same as the configuration described in Fig. 6 and Fig. 16. The horizontal transfer unit 55 has horizontal  
20 transfer electrodes 55a and 55b, which are alternately arranged along a horizontal line. As described above, the signal charges accumulated in the photo-diodes are repeatedly transferred to the vertical transfer unit during one field period and thereby integrated. When the signal charge is transferred from the  
25 photo-diodes to the vertical transfer unit, voltage signal, an

electric charge transfer signal, is applied to each of the selected groups of the electrodes in accordance with the mode selected by the V/D mode switch, such as Dn mode, Dh1 mode and Dh2 mode. Namely, the vertical transfer electrodes 52a<sub>1</sub>, 52a<sub>2</sub> and 52a<sub>3</sub> are individually operated in the above electric charge transferring operation. To the contrary, in a vertical transfer operation, voltage signals applied to the vertical electrodes 52a<sub>1</sub>, 52a<sub>2</sub> and 52a<sub>3</sub> are synchronous at all times. Thus, in the following description, reference 52a is used to represent the vertical electrodes 52a<sub>1</sub>, 52a<sub>2</sub> and 52a<sub>3</sub> and the electrodes 52a<sub>1</sub>, 52a<sub>2</sub> and 52a<sub>3</sub> are treated as a single electrical group. Namely, all the vertical transfer electrodes in the CCD 28 are separated into four groups of the electrodes, which are represented by the reference 52a, 52b, 52c and 52d. The signal charges integrated in the vertical transfer unit 52 are transferred downwardly in sequence along the vertical transfer unit 52 by the voltage signals of four phase driving pulse applied to the vertical transfer electrodes 52a, 52b, 52c and 52d. When the lowermost signal charges are transferred to the horizontal transfer unit 55 where the horizontal transfer electrodes 55a are disposed, driving pulses are output to the horizontal transfer electrodes 55a and 55b, and then the signal charges are horizontally transferred to the left side of the diagram and output from the CCD in sequence.

Fig. 19A, Fig. 19B and Fig. 19C show timing charts of

vertical transfer CCD pulses, which are the four phase driving pulses applied to the vertical transfer electrodes 52a, 52b, 52c and 52d, and a horizontal transfer CCD pulse to the horizontal electrodes 55a. Fig. 19A, Fig. 19B and Fig. 19C correspond to the timing charts of Dn mode, Dh1 mode and Dh2 mode respectively. An output timing of the horizontal transfer CCD pulse S50 and S51 is common to the above three modes and the time required for outputting signal charges of one line in the horizontal transfer operation is constant. A transportation of a signal charge from the vertical transfer unit 52 to the horizontal transfer unit 55 is executed during a period  $T_H$  when the horizontal transfer CCD pulse S50 is set to a high level.

In Dn mode, all of the photo-diodes in the CCD 28 are used for the distance information sensing operation, and therefore signal charges accumulated in the distance information sensing operation are stored in the vertical transfer unit 52 corresponding to every vertical transfer electrodes 52a, which are  $4 \cdot n$  th ( $n=1, 2, \dots$ ) electrode from the bottom. The vertical transfer CCD pulses S52, S53, S54 and S55 or the four phase driving pulses are output in turn for one period so as to transfer the signal charges downwardly through the vertical transfer unit, and when the vertical transfer CCD pulse S54 falls, one period of vertical transfer operation ends. With this one period of vertical transfer operation, signal charged stored beneath electrodes 52a and 52b in a certain horizontal line of the CCD

28 are transferred to those of the electrodes 52a and 52b disposed one line below and signal charges stored in the bottom line of the horizontal line are transferred to the horizontal transfer unit 55, namely, beneath horizontal transfer electrodes 55a.

5 Thus, the signal charges transferred to the horizontal transfer unit 55, which correspond to a set of signal charges for one horizontal line, are then transmitted horizontally through the horizontal transfer unit 55 and output from the CCD by the horizontal transfer CCD pulses S51. In the same way, one period

10 of vertical transfer CCD pulses S52, S53, S54 and S55 are output when the horizontal transfer signal S50 is set to high level, and then the horizontal transfer singles S51 are output and each set of the signal charges corresponding to each of horizontal lines in the CCD are output from the CCD sequentially. The

15 above operations are continued repeatedly until output of all the signal charges in the CCD is completed.

In the Dh1 mode, signal charges are only stored beneath the vertical transfer electrodes 52a<sub>1</sub> and 52a<sub>3</sub> of the vertical transfer unit 52. Namely, signal charges are only stored beneath

20 12·n th (n=1,2,...) electrodes from the bottom. Therefore three periods of vertical transfer CCD pulses are needed to transfer a signal charge to the horizontal transfer unit as described in Fig. 19B. Further, in Dh2 mode, signal charges are stored only beneath the electrodes 52a<sub>1</sub> of the vertical transfer unit,

25 24·n th (n=1,2,...) electrodes from the bottom, therefore six

periods of vertical transfer CCD pulses are needed to transfer a signal charge to the horizontal transfer unit as shown in Fig. 19C. The above signal charges transferred to the horizontal transfer unit by three or six periods of the vertical transfer  
5 CCD pulses are then output from the CCD by the horizontal transfer CCD pulses S51, in the same way as in Dn mode.

As described in Fig. 19B and Fig. 19C, in Dh1 or Dh2 modes, three or six periods of the vertical transfer CCD pulses are output during the horizontal transfer CCD pulse S50 in high level.  
10 Since the period of the pulse S50 is constant, the time required for outputting one line of detected signal charges is the same in each of the modes. However, in Dh1 mode and Dh2 mode, the number of lines used for detecting the signal charges is thinned out to 1/3 and 1/6 lines. Namely, the number of the horizontal  
15 transfer operations required in outputting all of the signal charges in the CCD is decreased to 1/3 or 1/6, thus the time required for outputting all the signal charges detected in the CCD is reduced to 1/3 or 1/6. For example, when the CCD has  
20 line (CCD of SXGA), 1024 periods of horizontal transfer CCD pulses S50 and S51 are required in order to output all the signal charges in the CCD. However, in Dh1 mode and Dh2 mode, 342 periods and 171 periods of the horizontal transfer CCD pulses are respectively required for carrying out the same.

25 Fig. 20 shows timing charts of the distance measurement

operation (comprising the distance information sensing operation, distance correction information operation, reflectance information sensing operation and reflectance correction information operation) executed in each of the mode

5 Dn, Dh1 and Dh2. Image signals output S71, S72, S73 and S74 indicate signals output from the CCD during the execution of the distance information sensing operation, the distance correction information operation, the reflectance information operation and reflectance correction information operation,

10 respectively. A detecting period  $T_0$  in the Dn mode corresponds to a frame period, which is 1/30 seconds when the NTSC standard is applied. Therefore, 2/15 seconds (133.3 ms), a time period  $T_3$ , is required in order to execute all of the distance measurement operation. In each of the sensing operations of

15 the distance measurement operations, there is a period  $T_1$  in which signal charges accumulated in a photo-diode are repeatedly transferred to a vertical transfer unit so as to integrate them, and a period  $T_2$  in which the signal charges integrated in the vertical transfer unit are output from the CCD through the

20 horizontal transfer unit. It requires 3.6  $\mu$ s for transmitting a signal charge from a photo-diode to the vertical transfer unit, when the width of the electric charge discharging signal S1 and the electric charge transfer signal S9 are 2  $\mu$ s and 1  $\mu$ s respectively; a time period between the fall of the electric

25 charge discharging signal S1 and the rise of the electric charge



transfer signal S9 is 500 ns; and a time period between the fall of the electric charge transfer signal S9 and the rise of the next electric charge discharging signal S1 is 100 ns, as shown in Fig. 7 for an example. Thus when signal charges are transferred 5 1000 times in one field period, which corresponds to 1000 times integration, the period  $T_1$  becomes 3.6 ms. Note that the period  $T_2$ , a period for outputting signal charges detected in the CCD, is 1/60 seconds (approximately 16.7 ms), which is one field period in NTSC standard.

10 On the other hand, in Dh1 and Dh2 modes, one field period is shorter than that of NTSC standard. Although, in Dh1 and Dh2 modes, the period  $T_1$  for 1000 times integrations of signal charges is the same as that of Dn mode, periods  $T_2'$  and  $T_2''$ , periods for outputting signal charges detected in the CCD, are 1/3 and 15 1/6 of the period  $T_2$  respectively, since the horizontal lines applied in the distance measurement operation are thinned out to 1/3 and 1/6 of all the horizontal lines in the CCD, which are used in Dn mode. Namely, the period  $T_2'$  becomes 5.6 ms and the period  $T_2''$  becomes 2.8 ms approximately. Further, when a 20 period from the end of the integration in the vertical transfer unit through the beginning of the vertical transfer operation and a period from the end of the vertical and horizontal transfer operations through the beginning of the signal charges integration prosecuted in the next sensing operations are, for 25 example, 1  $\mu$ s, the periods  $T_0'$  and  $T_0''$  in the Dh1 and Dh2 modes

become 9.2 ms and 6.4 ms, respectively. Therefore, time periods  $T_3'$  and  $T_3''$  required for prosecuting all of the distance measurement operations in Dh1 mode and Dh2 mode become 36.8 ms and 25.6 ms respectively. Consequently, a time required for the distance measurement operation is drastically shortened when the horizontal lines applied for the operation are thinned out, and this enables the three-dimensional image capturing device to detect the distance information of a fast moving subject.

As described above, according to the second embodiment, the advantages of the first embodiment are also obtained. Further, in the second embodiment, since a plurality of distance measurement modes, in which the number of horizontal lines applied in the distance measurement operations differs from one another, are prepared, distance information is sensed with the mode appropriate for subject speed, and precise distance information may be obtained.

Note that, in the second embodiment, similar to the first embodiment, an influence derived from noise, such as ambient daylight, is removed from the distance information of the measurement subject. Nevertheless, in a case where the influence can be neglected, a correction regarding only the reflectance of the surface of the measurement subject is carried out.

Further, in the second embodiment, although the accumulation of signal charge is performed for one field period in Steps 210, 215, 220 and 225, respectively, the accumulation

may be carried out for a plurality of field periods.

In the second embodiment, although the horizontal lines of the photo-diodes are separated into three electric groups, they may also be separated into two electric groups or four or 5 more electric groups. Further, in each distance measurement mode of the second embodiment, the horizontal lines used in each corresponding distance measurement operation are disposed every  $n-1$  lines (where  $n=1, 2$  and  $3$ ), however, horizontal lines applied in a distance measurement operation need not to be disposed 10 regularly for every predetermined line. For example, a distance measurement operation may be operated merely with photo-diodes  $51a_2$  or merely with photo-diodes  $51a_1$  and  $51a_2$ .

Although the embodiments of the present invention have been described herein with reference to the accompanying drawings, 15 obviously many modifications and changes may be made by those skilled in this art without departing from the scope of the invention.

The present disclosure relates to subject matter contained in Japanese Patent Application Nos. 11-162889 and 20 11-176968 (filed on June 9 and June 23, 1999, respectively) which are expressly incorporated herein, by reference, in their entireties.

# CLAIMS

1. A three-dimensional image capturing device, comprising:

a light source that radiates a distance measuring light beam irradiating a measurement subject, said measurement subject  
5 reflecting said distance measuring light beam to generate a reflected light beam;

a plurality of first photoelectric conversion elements and second photoelectric conversion elements, arranged in a predetermined direction, that receive said reflected light beam,  
10 so that electric charge corresponding to an amount of said received reflected light beam is accumulated in each of said first and second photoelectric conversion elements;

a first electric charge holding unit disposed adjacent to each of said first photoelectric conversion elements;

15 a second electric charge holding unit disposed adjacent to each of said second photoelectric conversion elements;

a first electric charge transfer processor that transfers first electric charge accumulated in said first photoelectric conversion elements to said first electric charge holding unit  
20 with first electrodes connected only to said first electric charge holding unit;

a second electric charge transfer processor that transfers second electric charge accumulated in said second photoelectric conversion elements to said second electric charge  
25 holding unit with second electrodes connected only to said

second electric charge holding unit; and

an electric charge integrating processor that drives said first electric charge transfer processor repeatedly, so that said first electric charge relating to distance information of said measurement subject is integrated in said first electric charge holding unit.

2. A device according to claim 1, comprising:

a first electric charge discharging processor that discharges unwanted charge accumulated in each of said first photoelectric conversion elements, so that an accumulating operation of electric charge is started in each of said first photoelectric conversion elements;

a second electric charge discharging processor that discharges unwanted charge accumulated in each of said second photoelectric conversion elements, so that an accumulating operation of electric charge is started in each of said second photoelectric conversion elements; and

wherein said electric charge integrating processor is operated by driving said first electric charge discharging processor and said first electric charge transfer processor alternately.

3. A device according to claim 2, wherein said first photoelectric conversion elements and said second photoelectric conversion elements are formed on a substrate, and said first electric charge discharging processor discharges said unwanted

charge to said substrate.

4. A device according to claim 1, wherein said first and second electric charge holding units are provided in a vertical transfer unit that outputs said electric charge from said three-dimensional image capturing device.

5. A device according to claim 1, wherein said first photoelectric conversion elements are arranged in a predetermined direction with a predetermined number of said second photoelectric conversion elements in between.

6. A device according to claim 2, wherein said first electric charge discharging processor outputs an electric charge discharging signal to discharge said unwanted charge, and said first electric charge holding processor outputs a first electric charge transfer signal to transfer said first electric charge to said first electric charge holding unit, and said second electric charge holding processor outputs a second electric charge transfer signal to transfer said second electric charge to said second electric charge holding unit, said electric charge discharging signal and said first and second electric charge transfer signals being pulse signals.

7. A device according to claim 6, wherein said first electric charge, corresponding to at least distance information of said measurement subject, accumulates in said first photoelectric conversion elements until a receiving of said reflected light beam by said first photoelectric conversion elements ends.

8. A device according to claim 7, wherein said first electric charge, corresponding to at least distance information of said measurement subject, starts to accumulate in said first photoelectric conversion elements when an output of said electric charge discharging signal ends.

9. A device according to claim 6, wherein said light source radiates a pulsed beam of said distance measuring light beam during a first accumulating period, which is from an output of said electric charge discharging signal to an output of said first electric charge transfer signal, and said first electric charge corresponding to distance information regarding said measurement subject is integrated in said first electric charge holding unit.

10. A device according to claim 1, comprising:  
a radiating operation control processor that prohibits a radiation of said distance measuring light beam from being radiated from said light source; and

an image information sensing processor that drives said first and second electric charge discharging processors and said first and second electric charge transfer processors, on condition that said radiation of said distance measuring light beam prohibited by said radiating operation control processor, so that said first and second electric charge corresponding to an image information of said measurement subject is transferred to said first and second electric charge holding units

respectively.

11. A three-dimensional image capturing device, comprising:  
a light source that radiates light irradiating a  
measurement subject;

5 a plurality of optical sensors that generate electric  
charge corresponding to an amount of light received by said optical  
sensors and is separated into predetermined groups;

electric charge transfer electrodes that are applied to  
each of said optical sensors in order to transport said electric  
10 charge generated in said optical sensors to the outside of said  
optical sensors;

an electric charge transfer unit that holds said electric  
charge transferred from said optical sensors by said electric  
charge transfer electrodes and transports said electric charge  
15 held in said electric charge transfer unit;

an electric charge transfer electrode control processor  
that can control each said group of said electric charge transfer  
electrodes independently; and

an electric charge accumulating processor that  
20 repeatedly drives said electric charge transfer electrode  
control processor and repeatedly transfers electric charge  
generated in certain said groups of said optical sensors, so  
that transferred electric charge accumulates in said electric  
charge transfer unit.

25 12. A three-dimensional image capturing device, comprising:



a light source that radiates a distance measuring light beam irradiating a measurement subject, said measurement subject reflecting said distance measuring light beam to generate a reflected light beam;

5 a plurality of photoelectric conversion elements that receive said reflected light beam, so that electric charge corresponding to an amount of said received reflected light beam is accumulated in each of said photoelectric conversion elements, and is disposed in a matrix arrangement;

10 a vertical transfer unit that is disposed along each vertical line of said photoelectric conversion elements, so that said electric charge accumulated in said photoelectric conversion elements is transferred in a vertical direction;

a horizontal transfer unit that is disposed nearby one  
15 end of said vertical transfer unit and in parallel with horizontal lines of said photoelectric conversion elements, so that said electric charge is transferred in a horizontal direction;

a electric charge transfer processor that transfers  
20 electric charge accumulated only in photoelectric conversion elements comprising effective horizontal lines, which are disposed every predetermined number of said horizontal lines;

a electric charge integrating processor that drives said electric charge transfer processor repeatedly and integrates  
25 said electric charge accumulated in said photoelectric

conversion elements comprising said effective horizontal lines,  
in said vertical transfer unit; and

a transfer operation control processor that controls said  
horizontal transfer unit and said vertical transfer unit, so  
5 that said horizontal transfer unit is driven only when said  
electric charge corresponding to said effective horizontal lines  
is transferred to said horizontal transfer unit.

13. A device according to claim 12, wherein said horizontal  
lines are separated into a plurality of groups and said effective  
10 horizontal lines are composed of one of said groups or combination  
of said groups.

14. A device according to claim 13, wherein said horizontal  
lines are separated into first, second and third groups, and  
an arrangement of said first, second and third groups in vertical  
15 direction is a repetition of a "first, second, second, third,  
second, second" order.

15. A device according to claim 12, comprising an electric  
charge discharging processor that starts accumulation of said  
electric charge in said photoelectric conversion elements by  
20 discharging unwanted charge accumulated in said photoelectric  
conversion elements, and wherein said electric charge  
integrating processor is operated by driving said electric  
charge discharging processor and said electric charge transfer  
processor alternatively.

25 16. A device according to claim 15, wherein said photoelectric

conversion elements are formed on a substrate, and said electric charge discharging processor discharges said unwanted charge to said substrate.

17. A device according to claim 16, wherein accumulation of electric charge corresponding to at least distance information of said measurement subject starts in said photoelectric conversion elements when an output of an electric discharging signal, which discharges said unwanted charge in said electric charge discharging processor, ends.

18. A device according to claim 17, wherein said light source radiates a pulsed beam of said distance measuring light beam during a first accumulating period, which is from an output of said electric charge discharging signal to an output of said electric charge transfer signal, and said electric charge corresponding to distance information regarding said measurement subject is integrated in said vertical transfer unit of said effective horizontal lines.

19. A three-dimensional image capturing device, comprising:  
a light source that radiates light irradiating a measurement subject;

a plurality of photoelectric conversion elements that can accumulate electric charge corresponding to an amount of light received by said photoelectric conversion elements, and disposed in a matrix arrangement;

a electric charge transfer control processor that

controls an electric transfer operation, which outputs electric charge accumulated in said photoelectric conversion elements to the outside of said photoelectric conversion elements;

5 a distance calculating processor that calculates a distance, from said photoelectric conversion element to said measurement subject, from an amount of electric charge accumulated in said photoelectric conversion elements from light reflected by said measurement subject and received in said photoelectric conversion elements;

10 a first distance measuring processor that drives said electric charge transfer control processor in order to output electric charge accumulated in all said photoelectric conversion elements, and calculates distances corresponding to all said photoelectric conversion elements by means of said distance  
15 calculating processor; and

a second distance measuring processor that drives said electric charge transfer control processor in order to output electric charge accumulated in selected photoelectric conversion elements, and calculates distances corresponding  
20 to said selected photoelectric conversion elements by means of said distance calculating processor.

20. A device according to claim 19, comprising a distance measurement selecting processor that selects either said first or second distance measuring processor and drives the selected  
25 processor.

21. A device according to claim 20, wherein said first distance measuring processor is for measuring a stationary measurement subject and said second distance measuring processor is for measuring a moving measurement subject.

5 22. A device according to claim 21, wherein said photoelectric conversion elements comprise first photoelectric conversion elements and second photoelectric conversion elements a number of said second photoelectric conversion elements being less than that of said first photoelectric conversion elements, and said  
10 second distance measuring processor comprising;

a first high speed mode that drives said electric charge transfer control processor so as to output electric charge from said first photoelectric conversion elements and calculates said distance corresponding to said first photoelectric conversion  
15 elements;

a second high speed mode that drives said electric charge transfer control processor so as to output electric charge from said second photoelectric conversion elements and calculates said distance corresponding to said second photoelectric  
20 conversion elements; and wherein

said distance is calculated with said first high speed mode when said measurement subject is moving at a relatively slow speed, and with said second high speed mode when said measurement subject is moving at a relatively fast speed.

# THREE-DIMENSIONAL IMAGE CAPTURING DEVICE

## ABSTRACT OF THE DISCLOSURE

5           A three-dimensional image capturing device comprises an  
imaging device, such as a CCD, having a plurality of photo-diodes,  
a vertical transfer unit and a substrate. The plurality of  
photo-diodes is separated into a plurality of groups and each  
of the groups can be controlled independently. A distance  
10 measuring light beam having a predetermined pulse width is  
radiated to a measurement subject and a reflected light beam,  
generated by the measurement subject due to the distance measuring  
light beam, is sensed by the photo-diodes, so that a distance  
information sensing operation which detects distance  
15 information of the measurement subject is executed. In the  
distance information sensing operation, only predetermined  
groups of the photo-diodes are used for sensing the distance  
information, while in an image information sensing operation,  
which detects an image of the measurement subject, all  
20 photo-diodes in the CCD are used.

FIG. 1

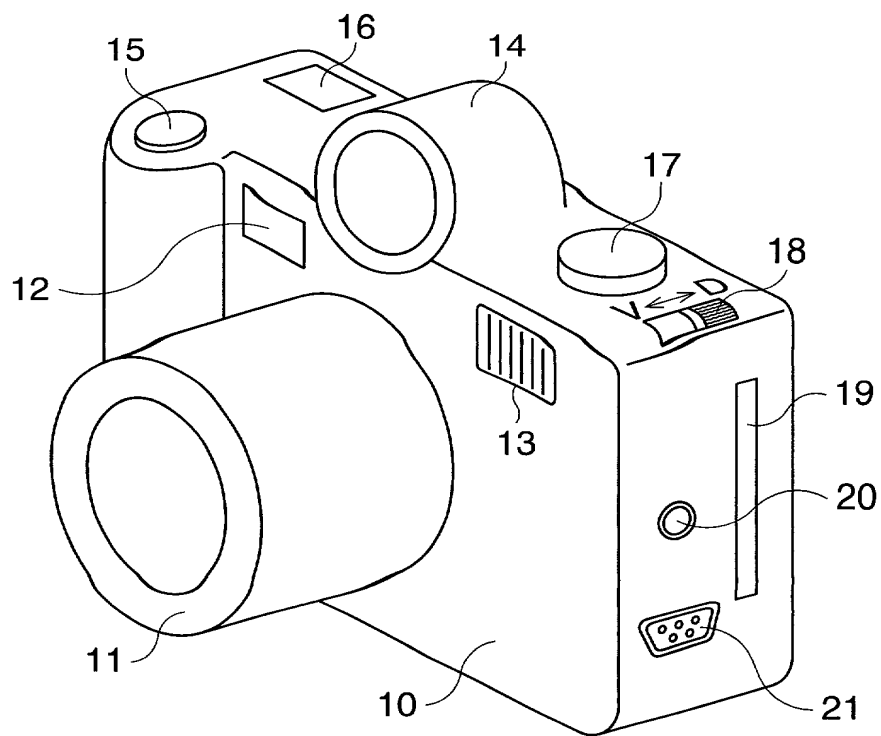


FIG. 2

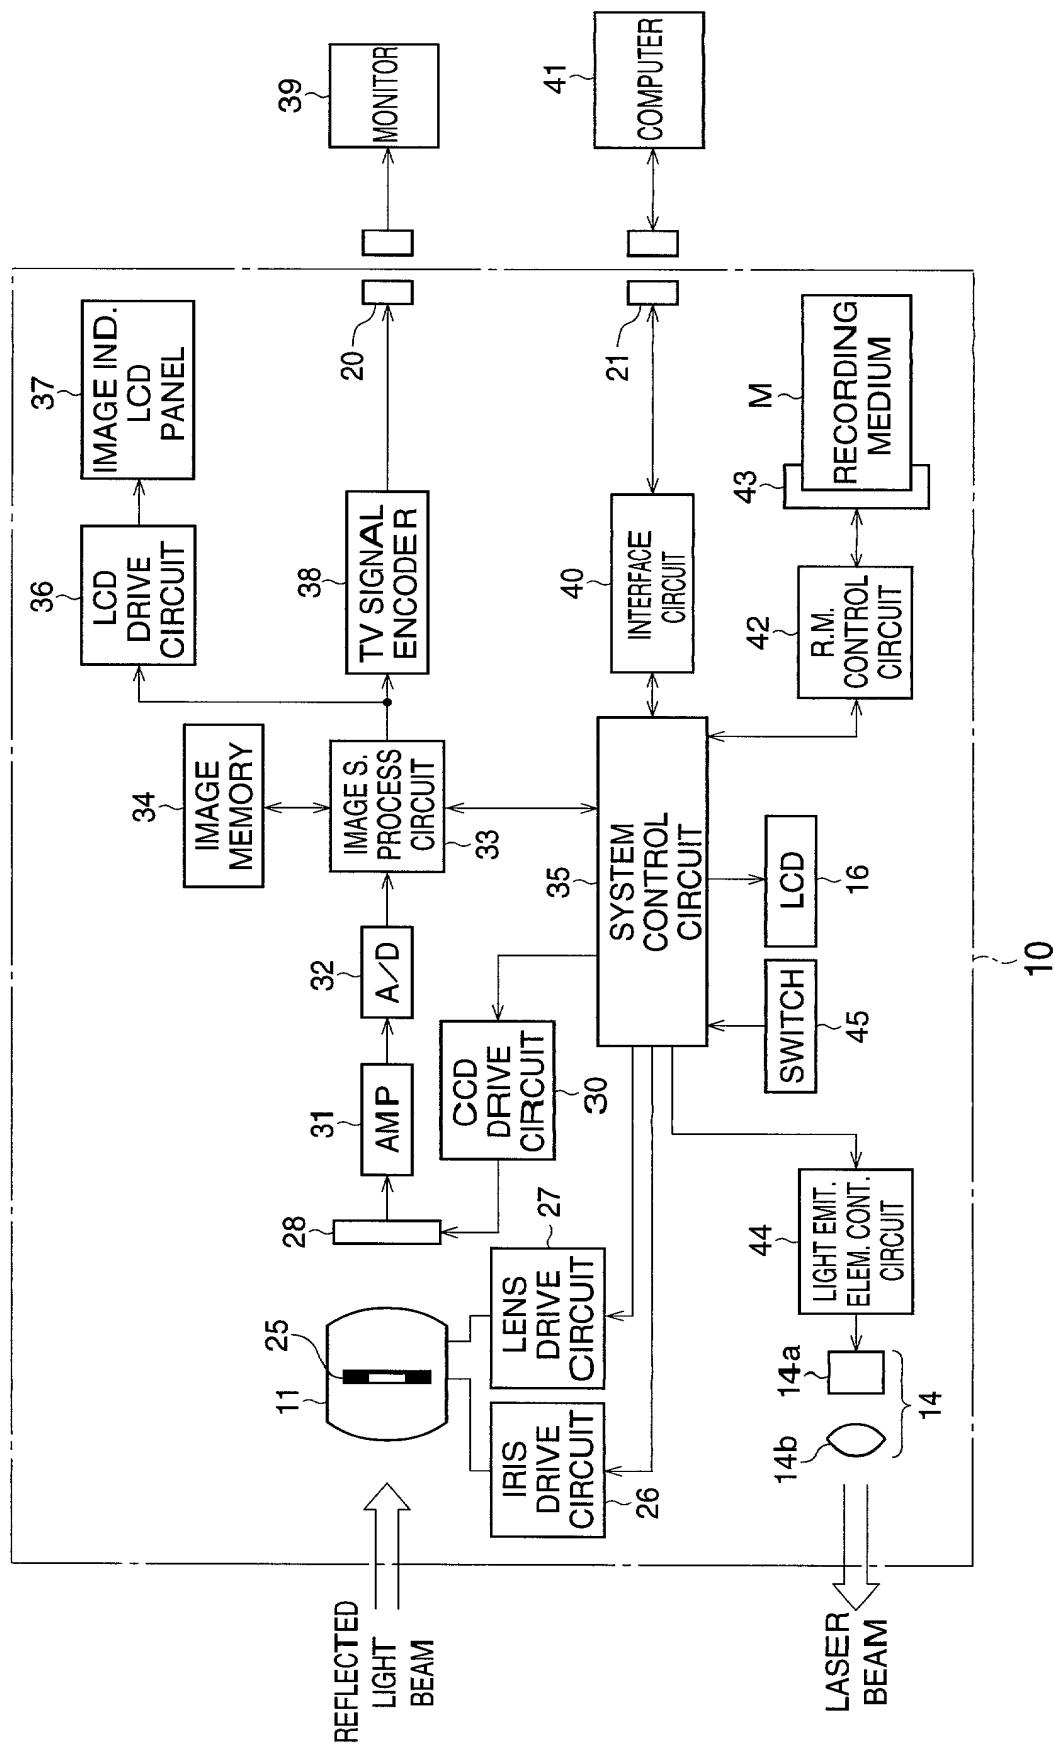




FIG. 3

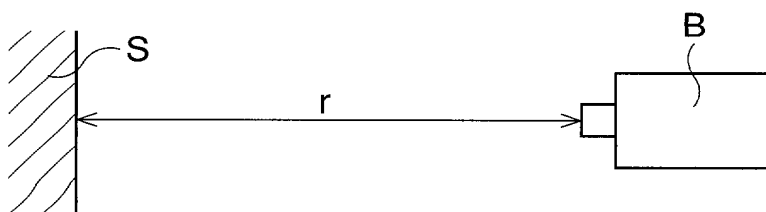


FIG. 4

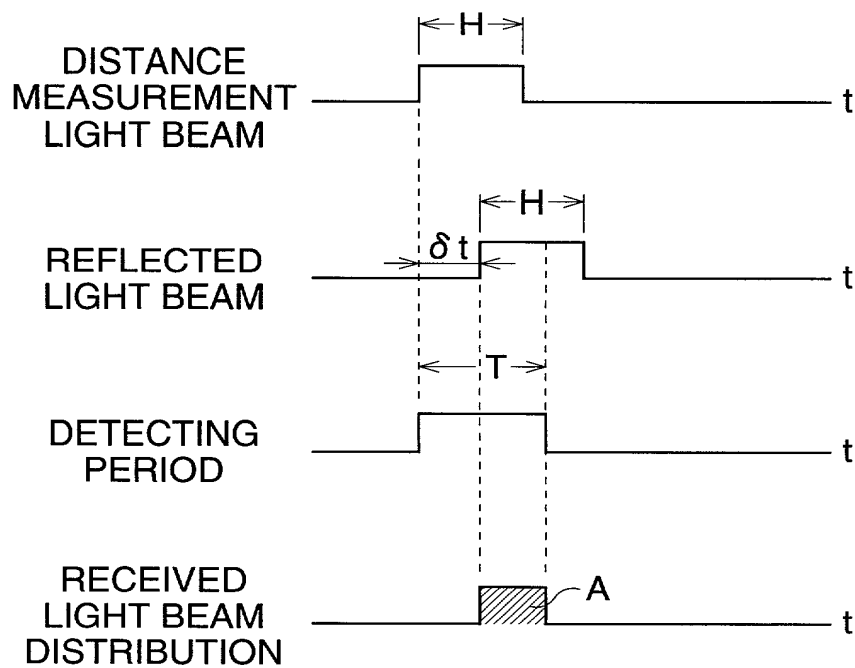


FIG. 5

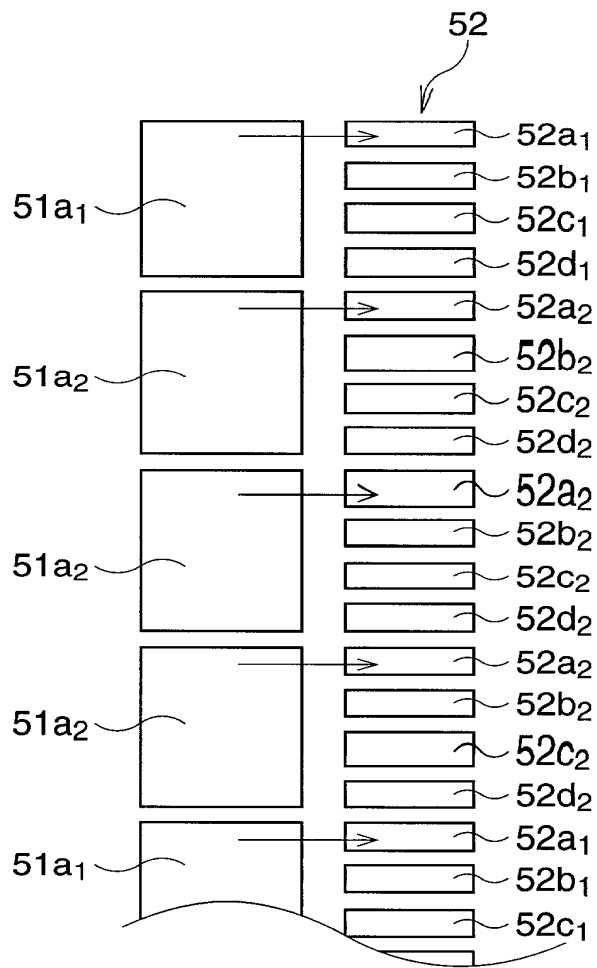


FIG. 6

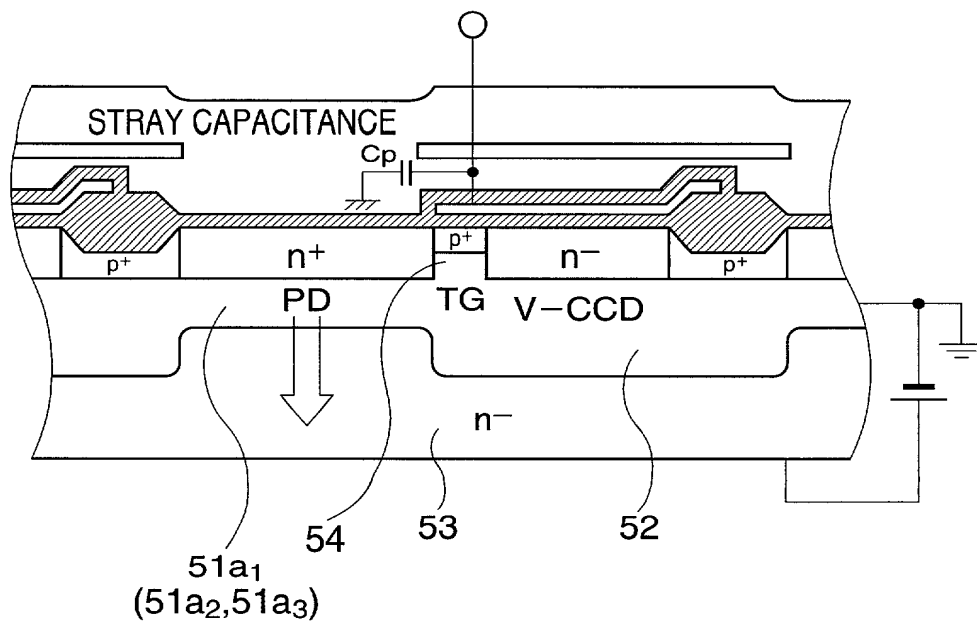


FIG. 7

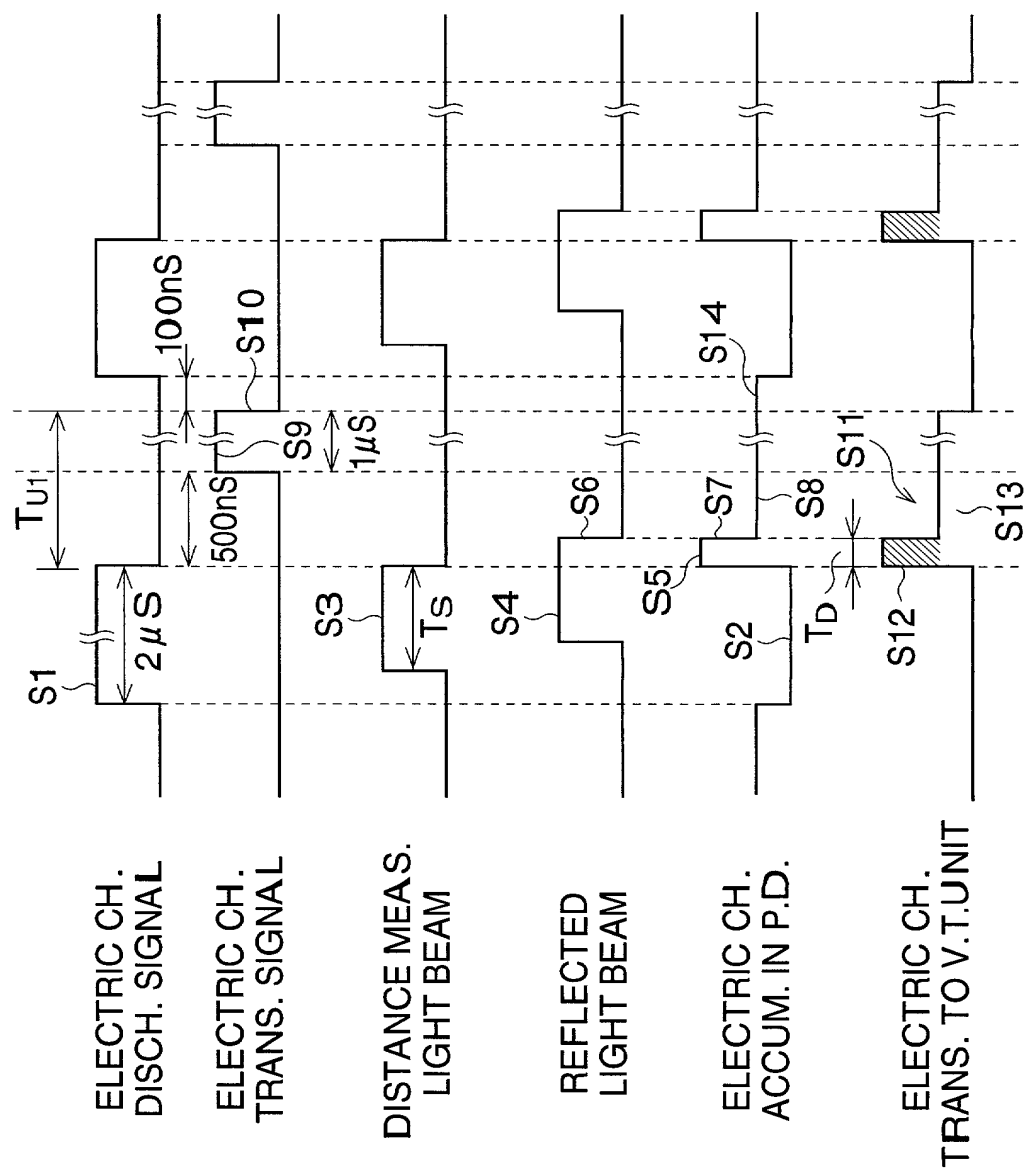
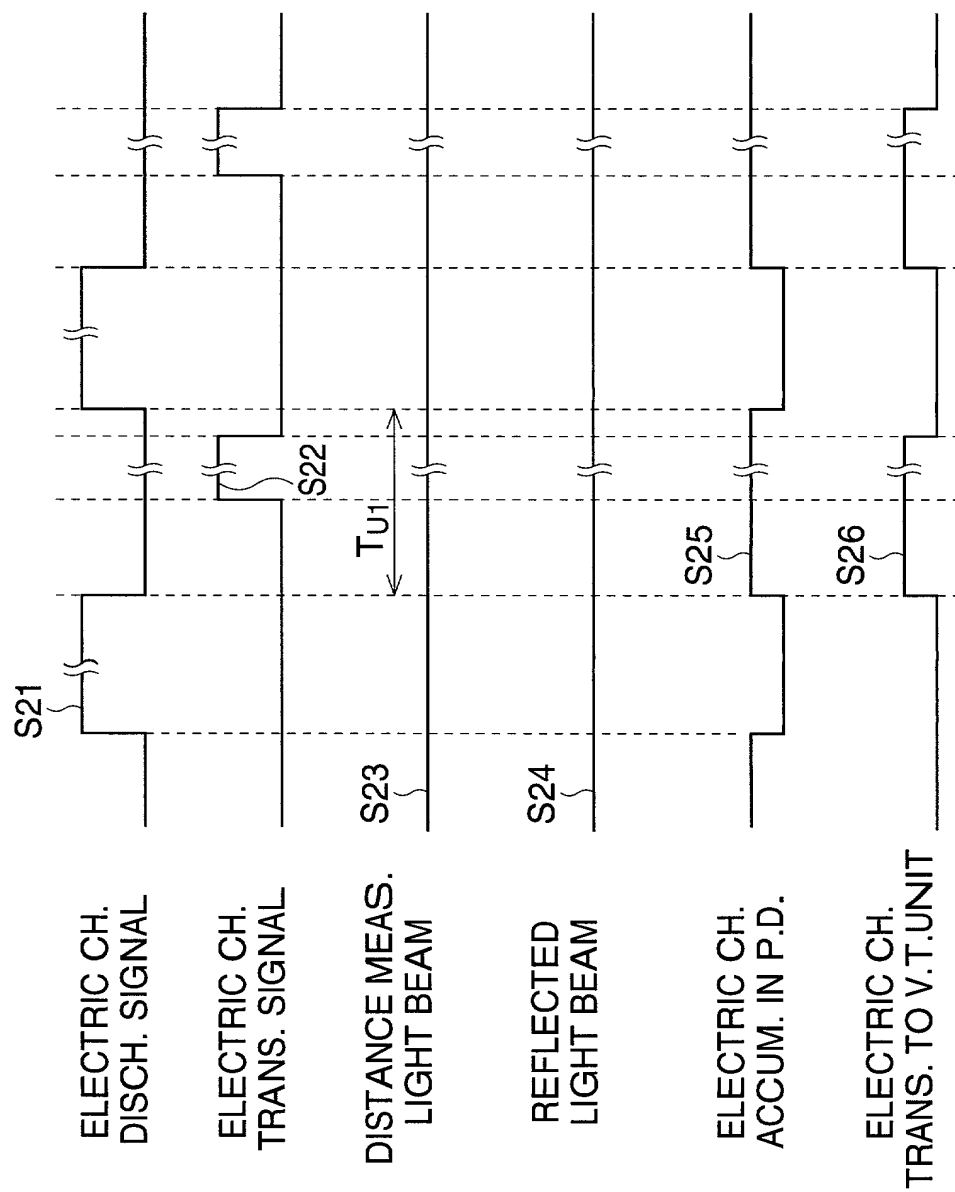


FIG. 8



**FIG. 9**

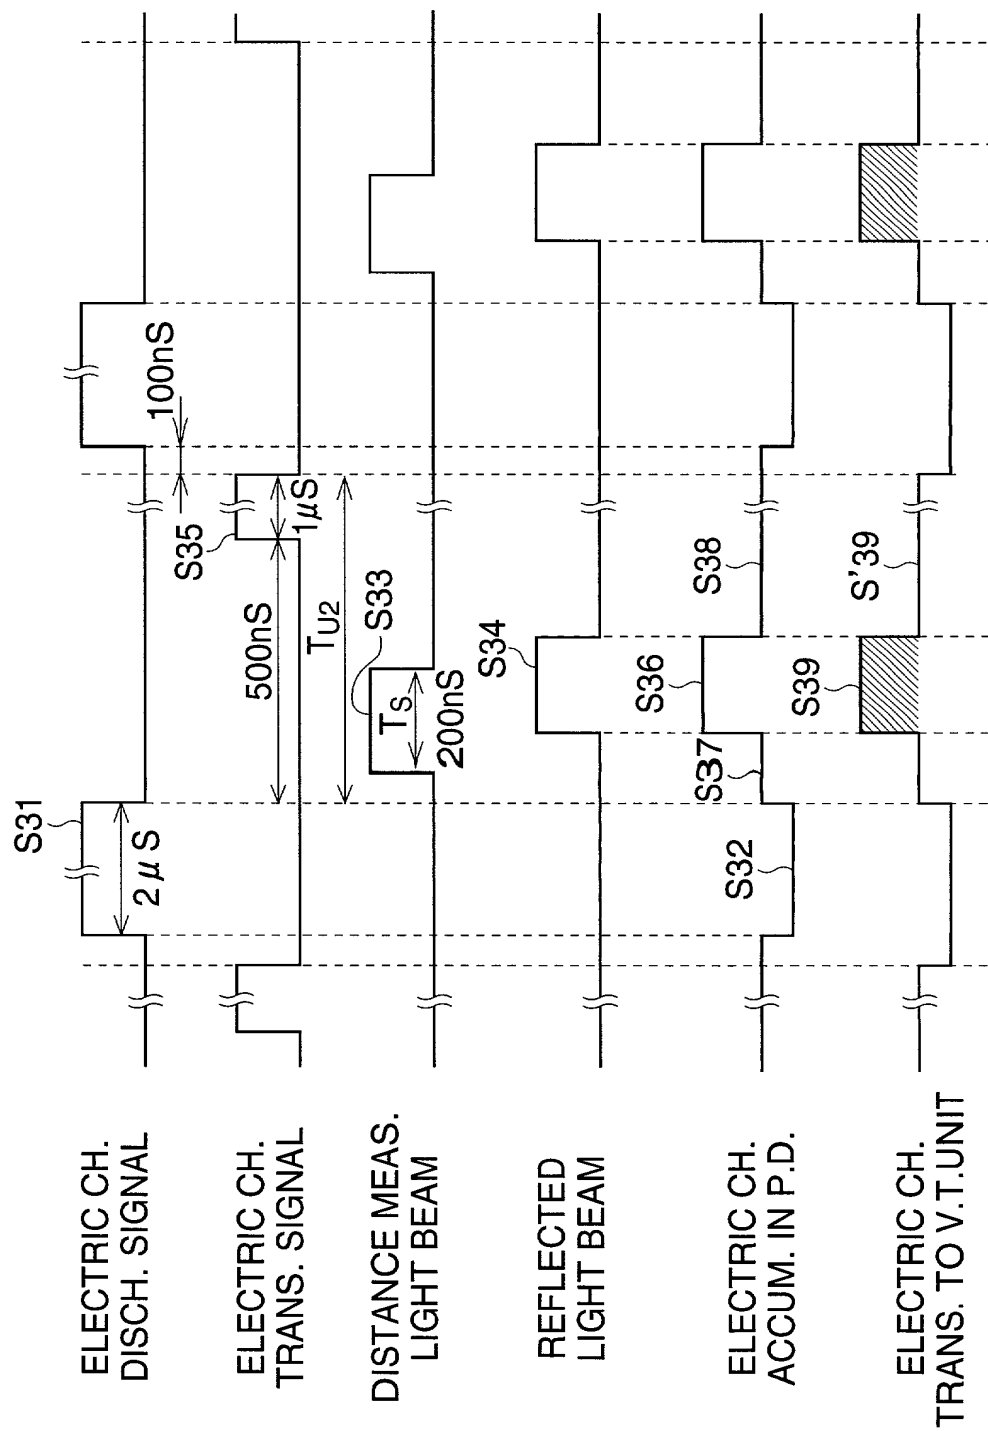


FIG. 10

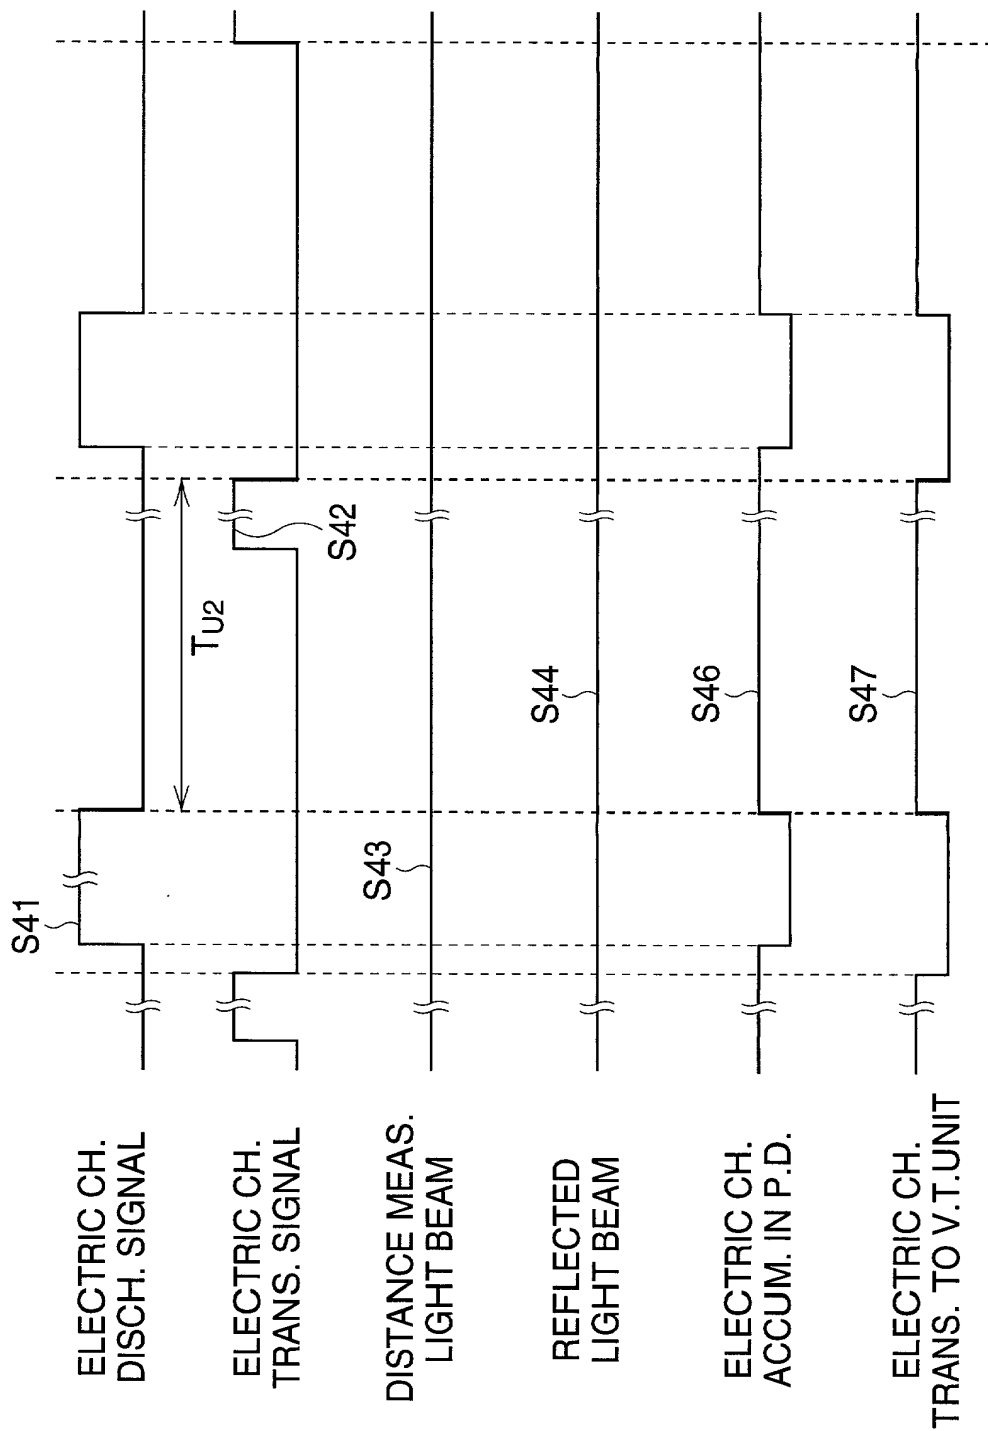
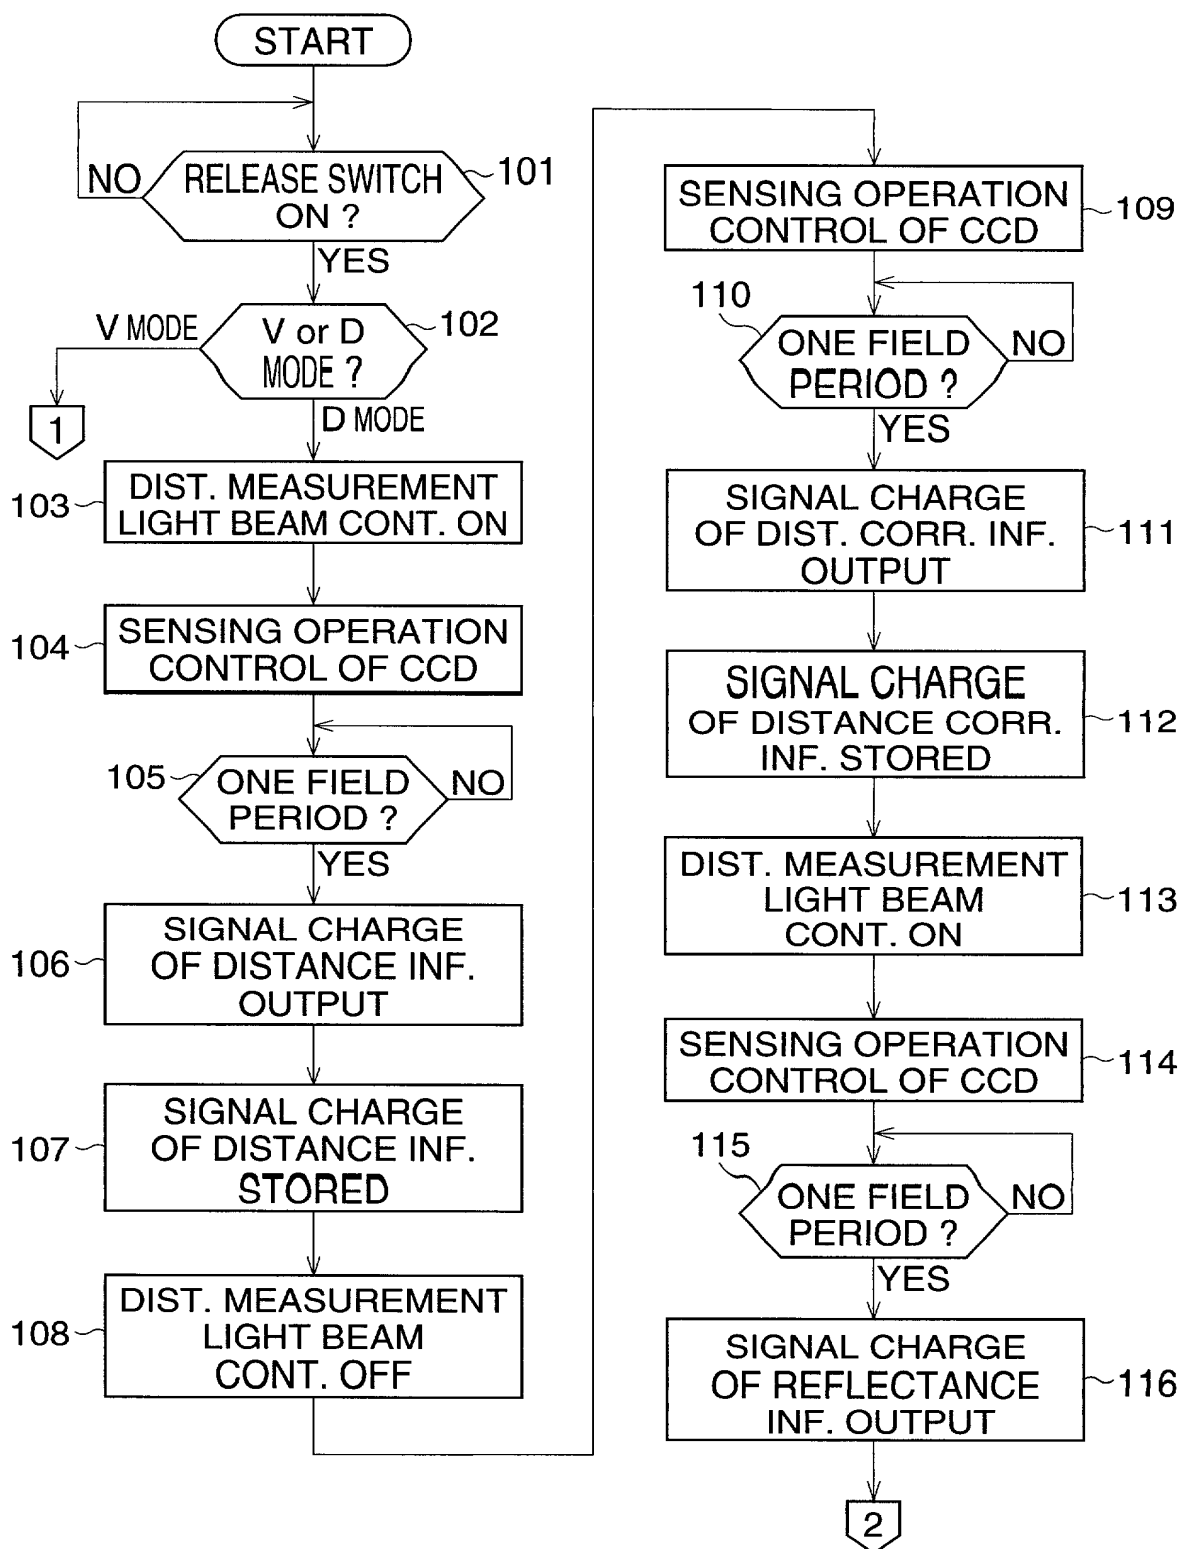


FIG. 11A





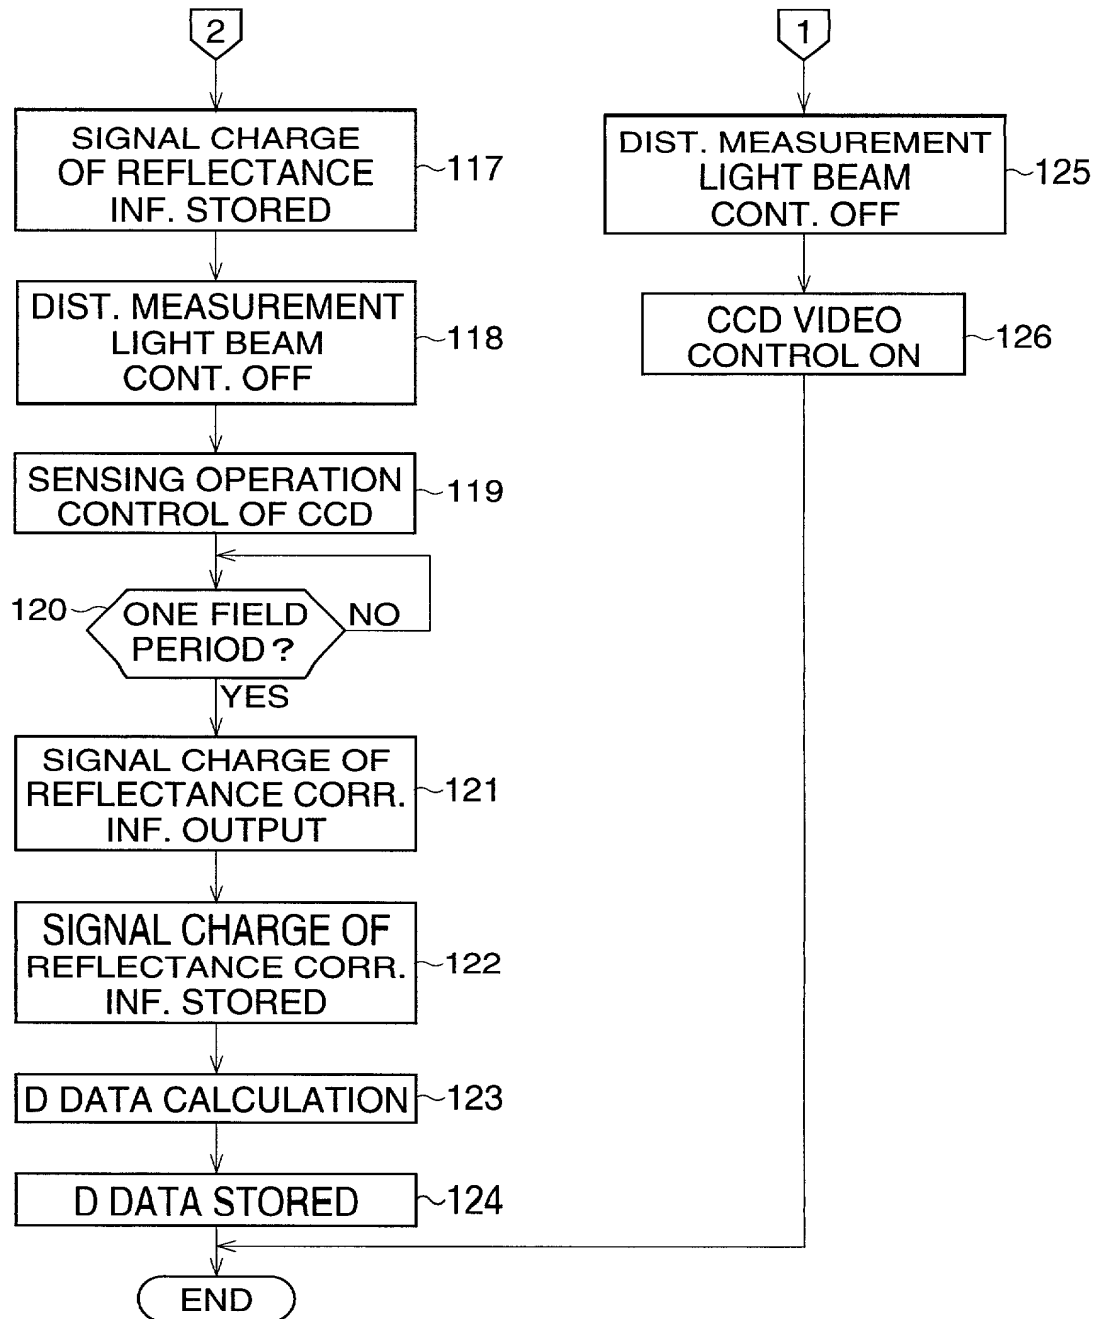


FIG. 12

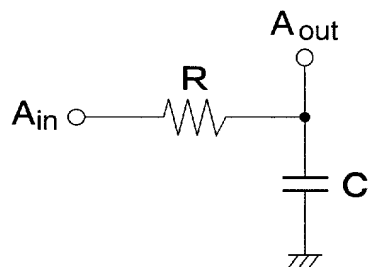


FIG. 13


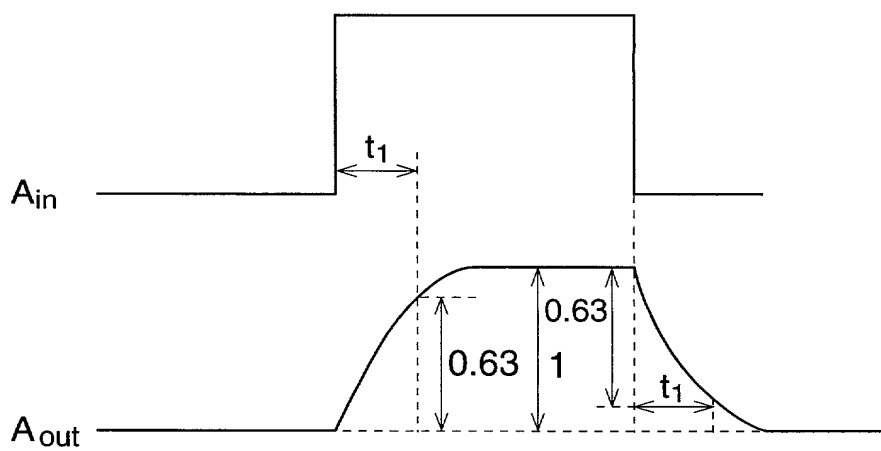


FIG. 14

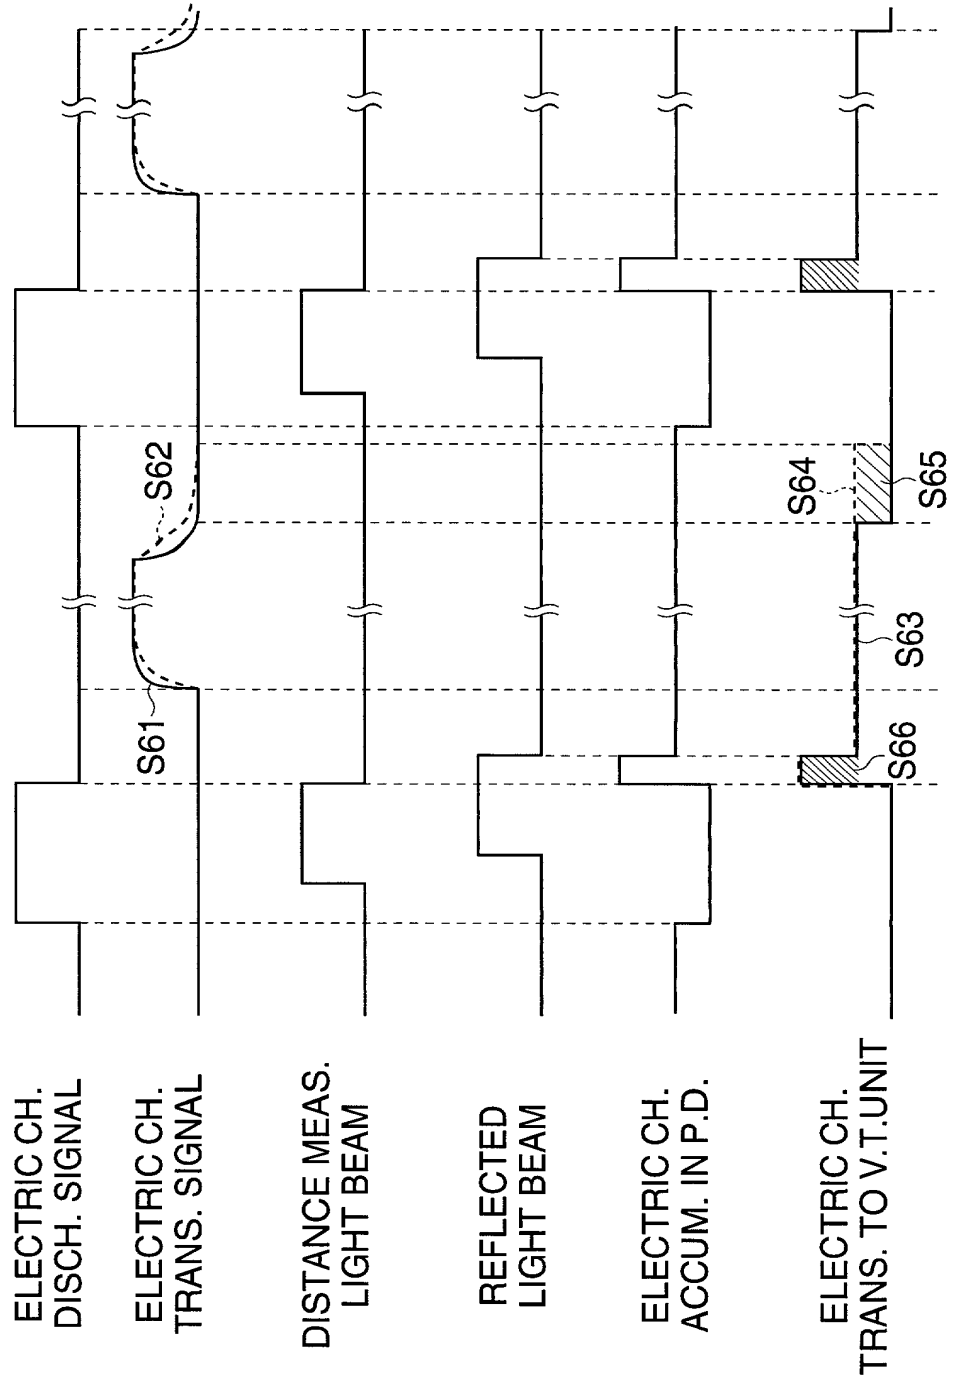

14/23

FIG. 15

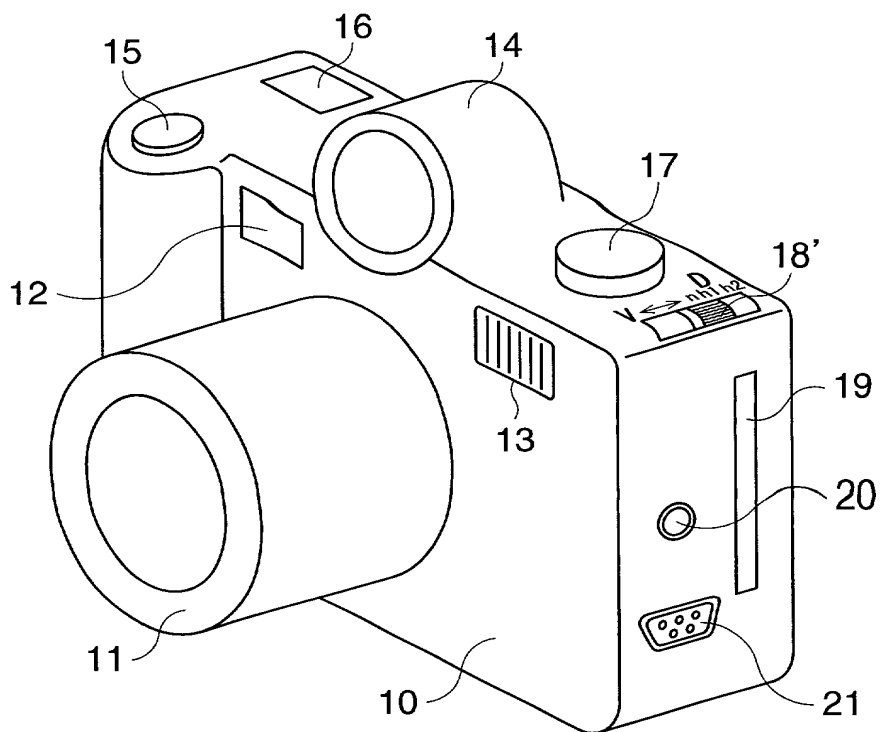


FIG. 16

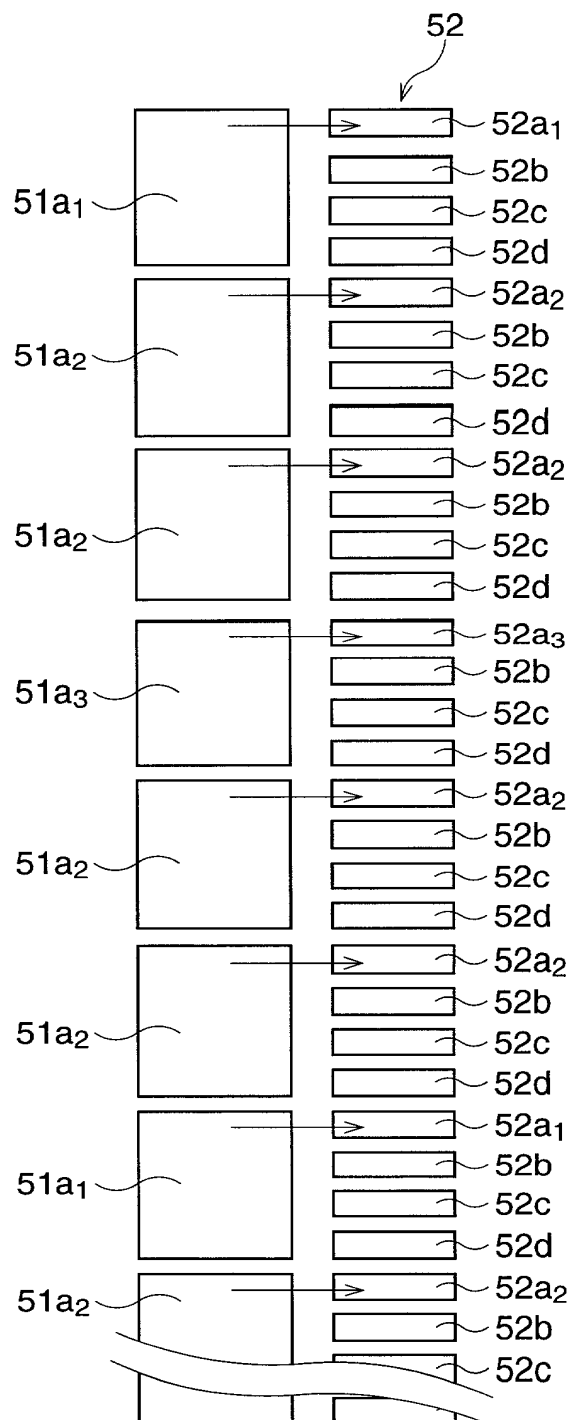


FIG. 17A

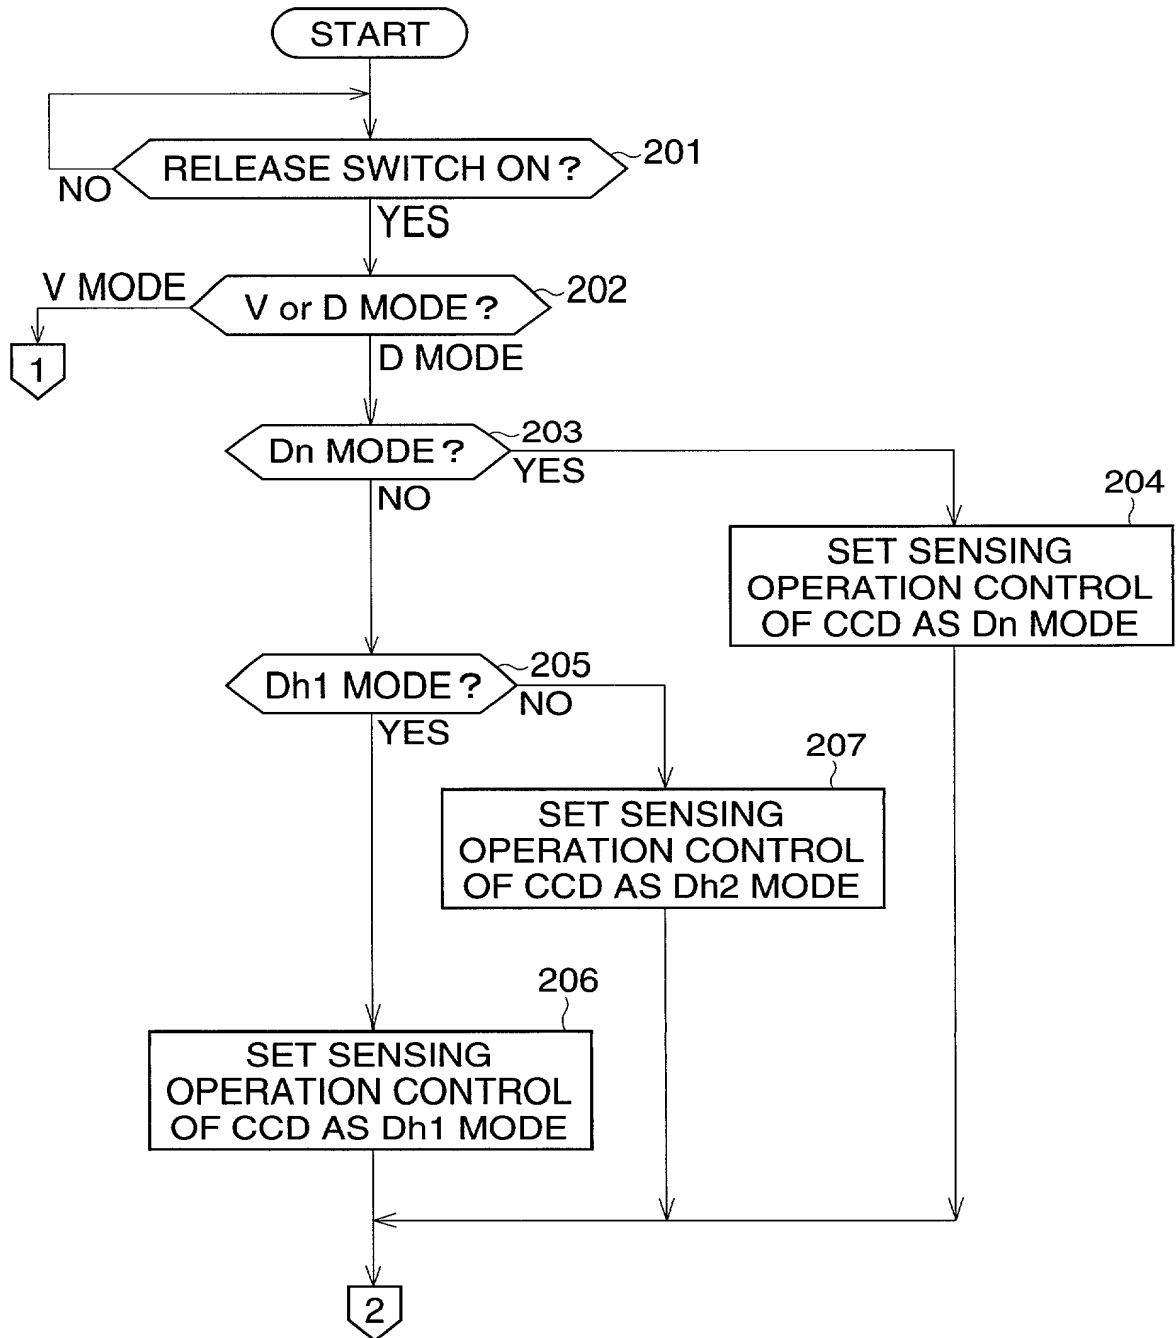


FIG. 17B

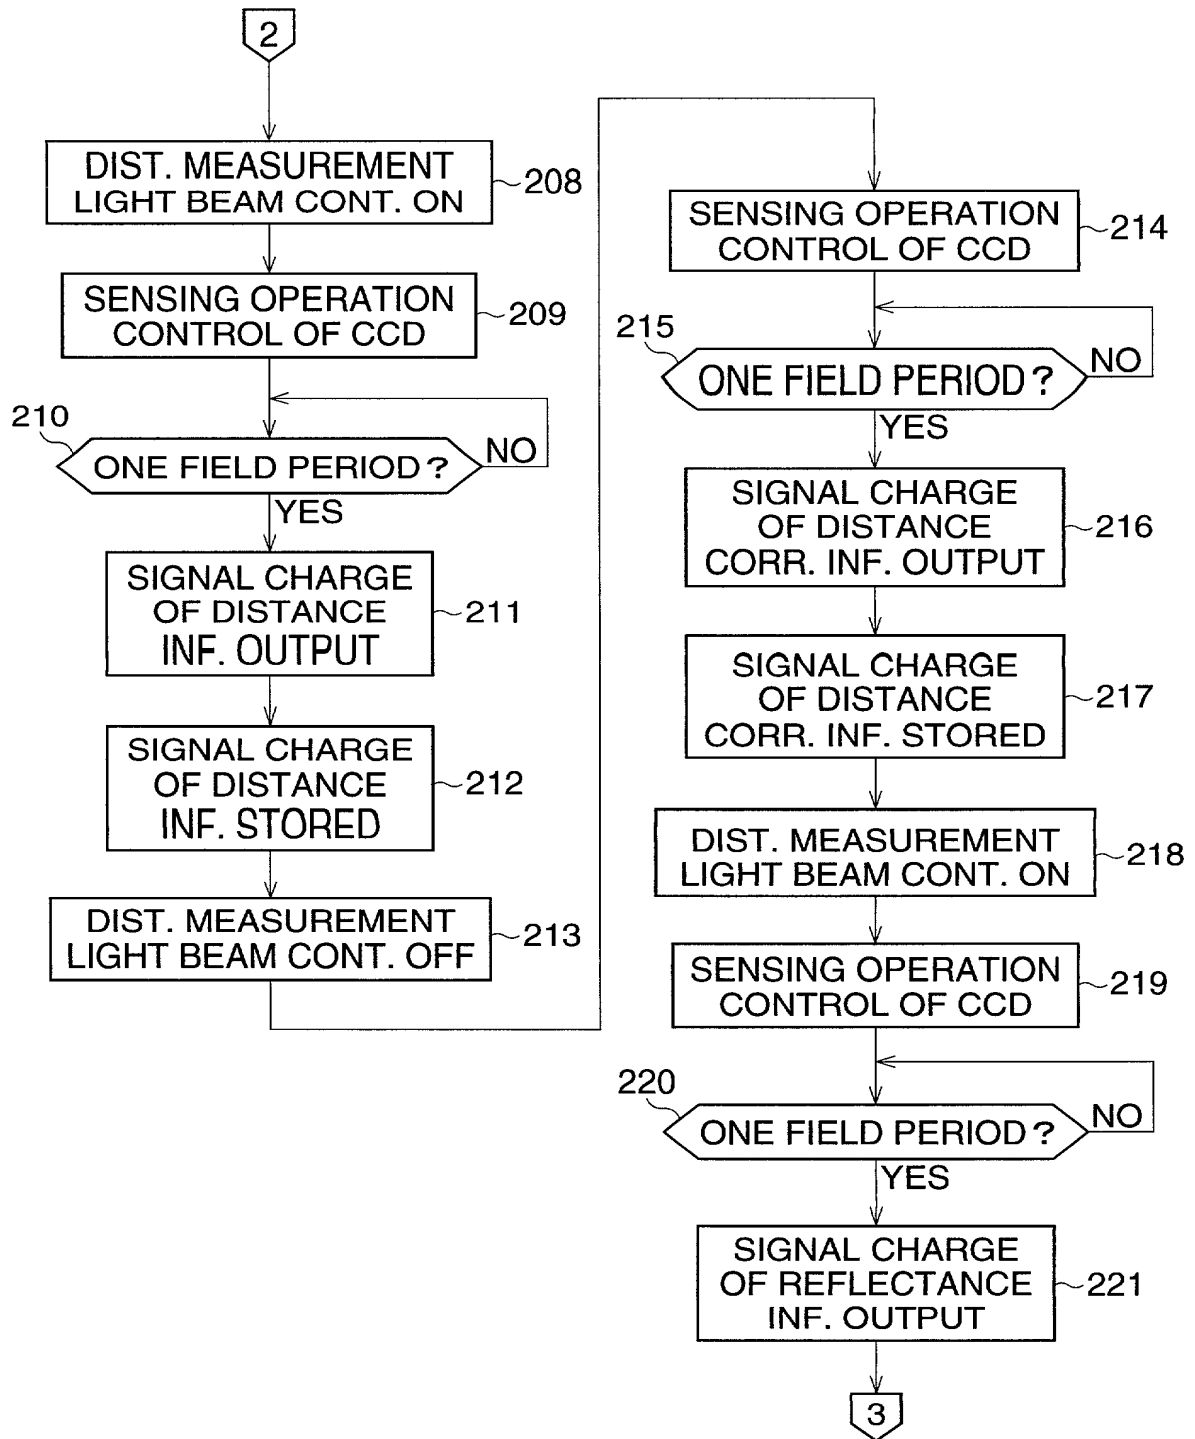


FIG. 17C

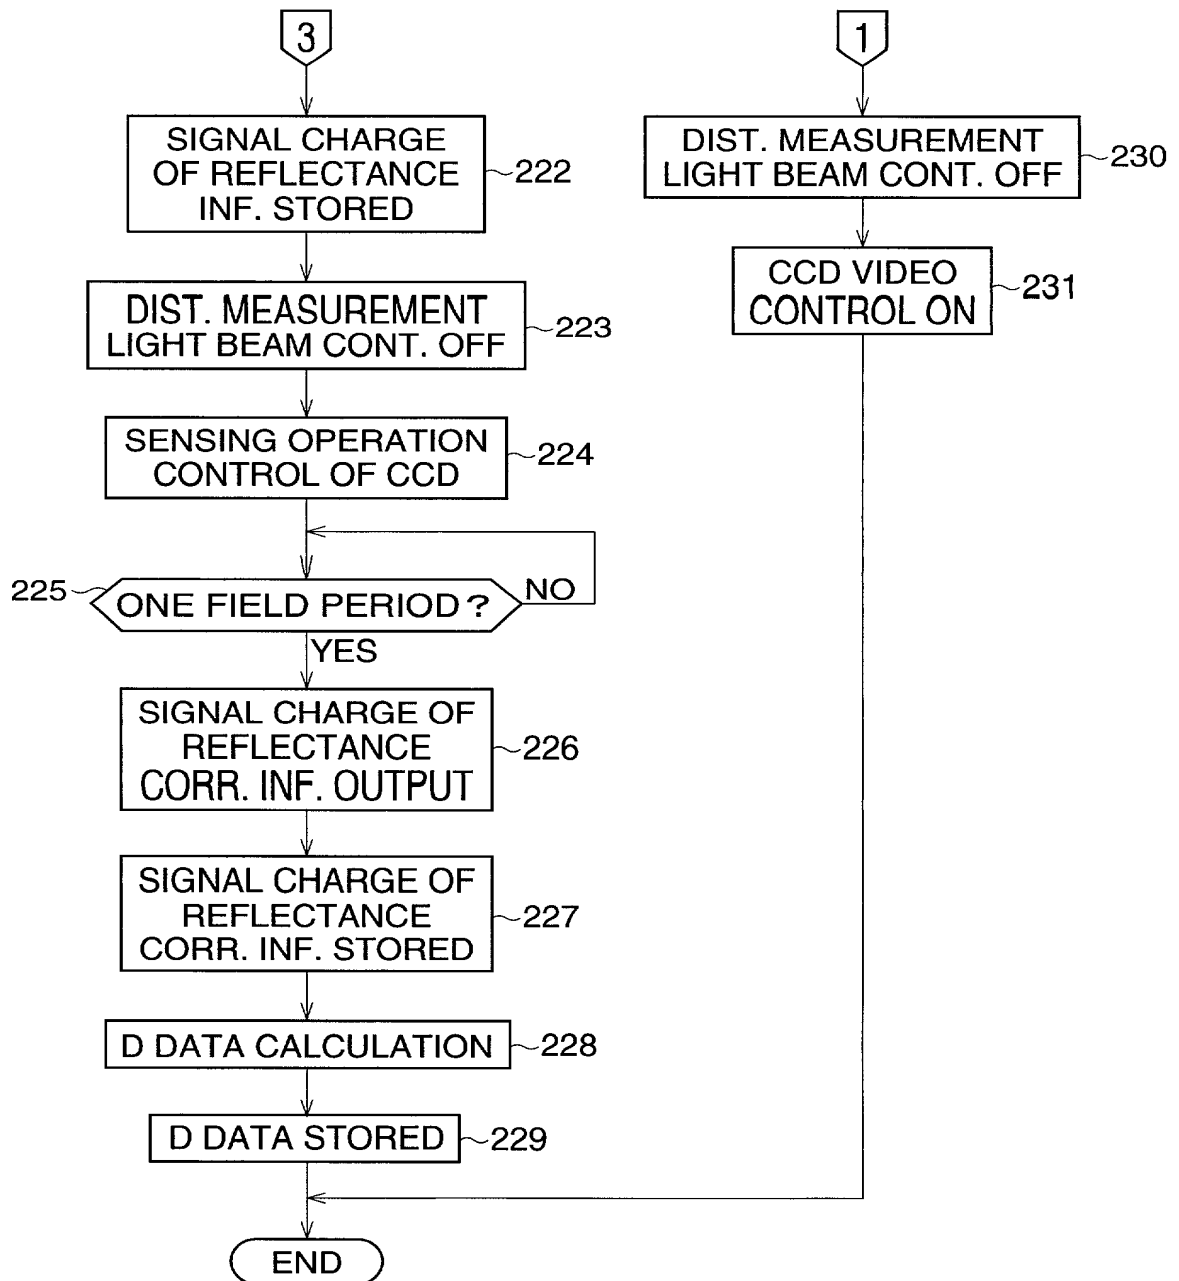




FIG. 18

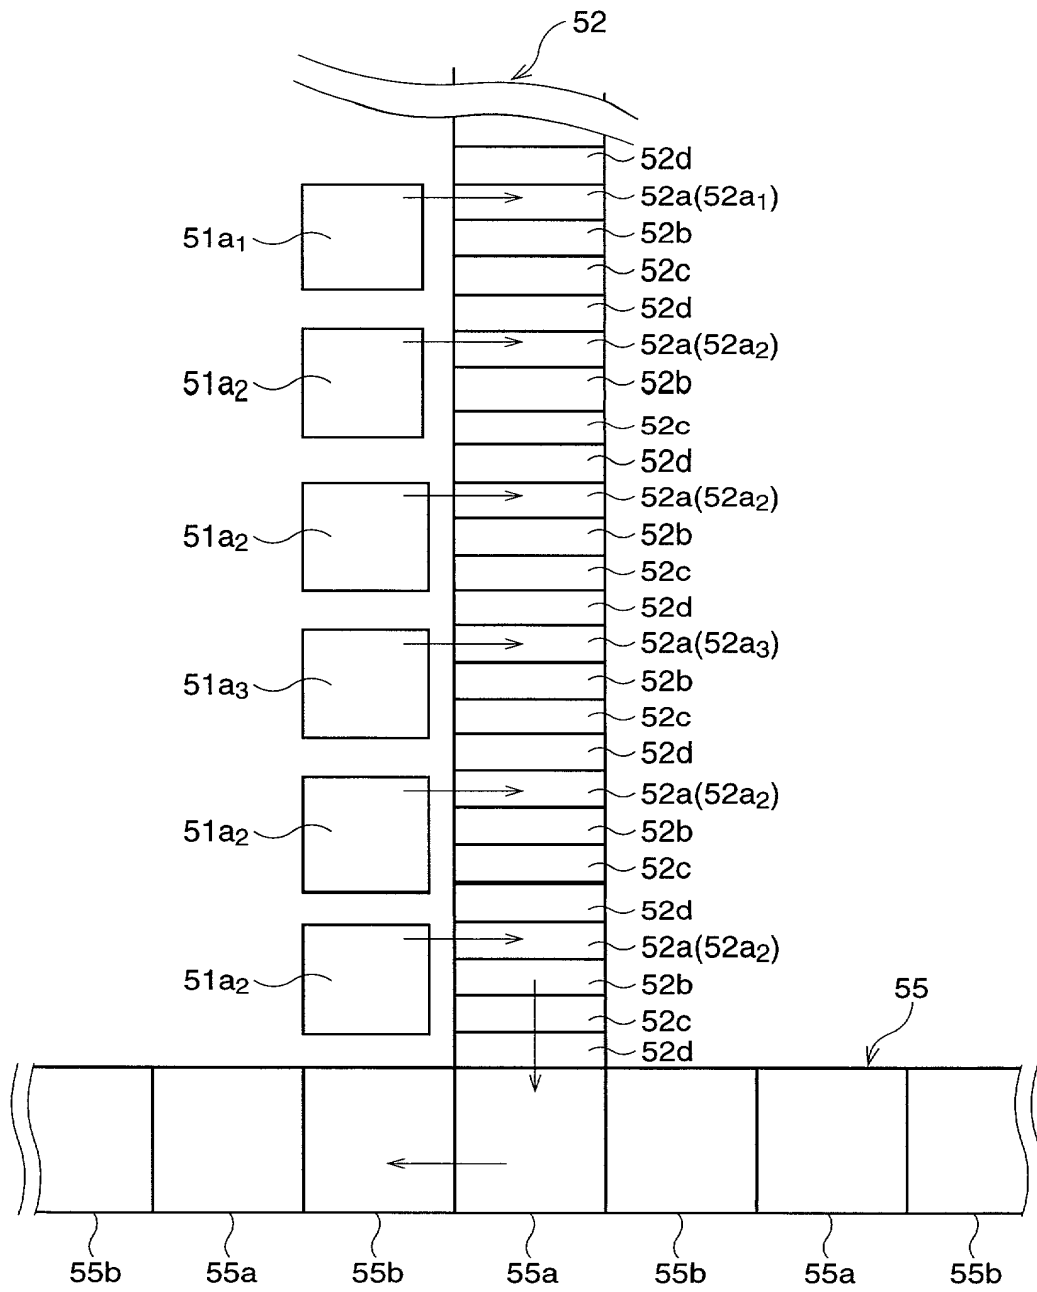


FIG. 19A

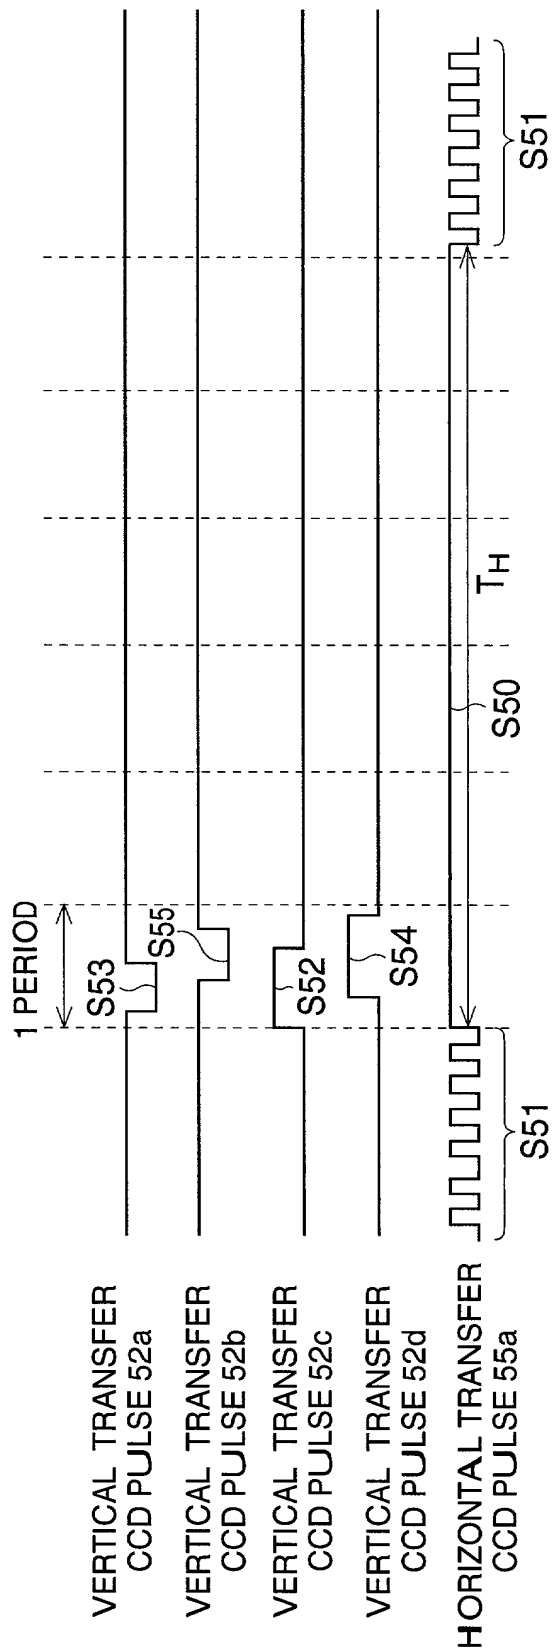


FIG. 19B



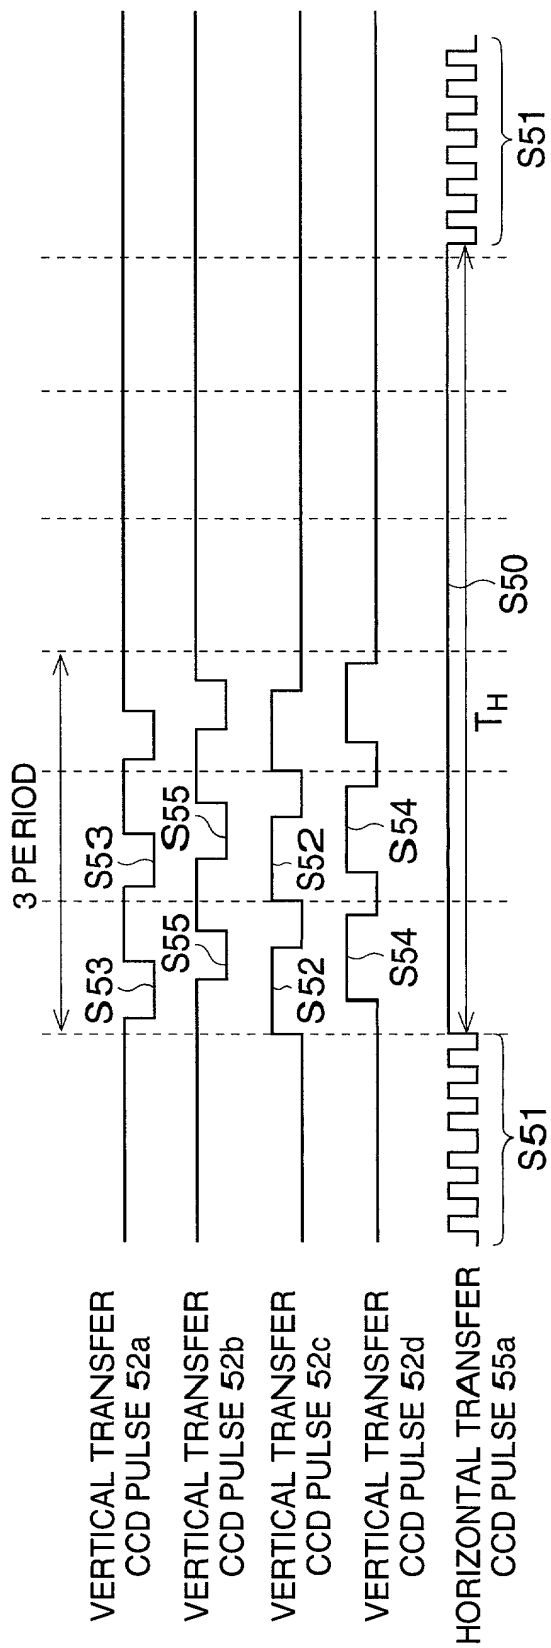





FIG. 20

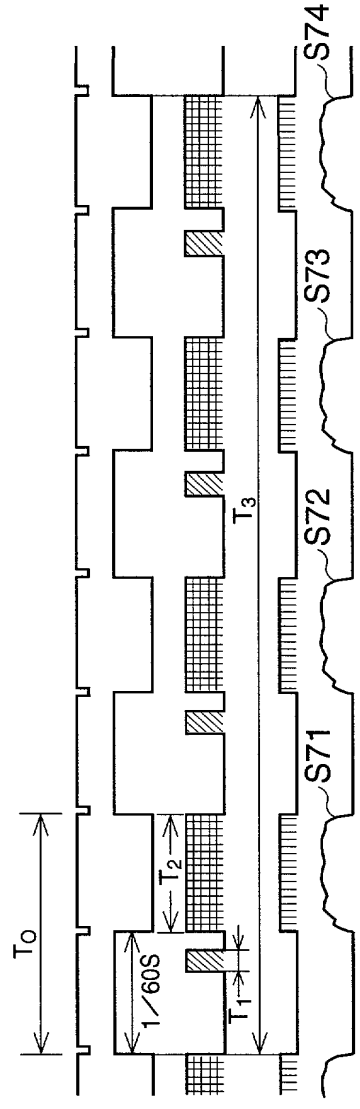

VERTICAL SYNC. SIGNAL  
FIELD SIGNAL  
VERTICAL TRANS. CCD PULSE  
HORIZONTAL TRANS. CCD PULSE  
SIGNAL OUTPUT

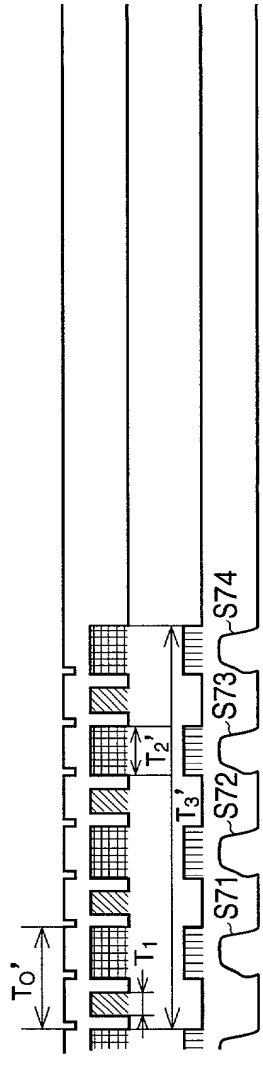

VERTICAL SYNC. SIGNAL  
VERTICAL TRANS. CCD PULSE  
HORIZONTAL TRANS. CCD PULSE  
SIGNAL OUTPUT

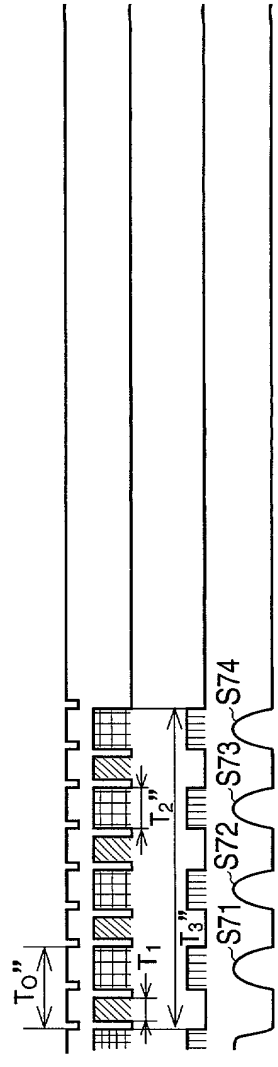

VERTICAL SYNC. SIGNAL  
VERTICAL TRANS. CCD PULSE  
HORIZONTAL TRANS. CCD PULSE  
SIGNAL OUTPUT

# Declaration and Power of Attorney For Utility or Design Patent Application

## 特許出願宣言書

### Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり  
宣言する：

私の住所、郵便の宛先および国籍は、下欄に氏名に続いて記載したとおり  
であり、

名称の発明に関し、請求の範囲に記載した特許を求める主題の本来の、  
最初にして唯一の発明者である(一人の氏名のみが下欄に記載されている  
場合)か、もしくは本来の、最初にして共同の発明者である(複数の氏名が  
下欄に記載されている場合)と信じ、

その明細書を

(該当するほうに印を付す)

☐ ここに添付する。

☐ \_\_\_\_\_ 日に 出願番号  
第 \_\_\_\_\_ 号として提出し、  
\_\_\_\_\_ 日に補正した。

(該当する場合)

私は、前記のとおり補正した請求の範囲を含む前記明細書の内容を検討  
し、理解したことを陳述する。

私は、連邦規則法典第37部第1章第56条に従い、本題の審査に所要の  
情報を開示すべき義務を有することを認める。

私は合衆国法典第35部第119条(a-d)項又は第365条(b)項に基づき、下  
記の外国特許出願又は発明者証出願、或いは第365条(a)項に基づき、少な  
くとも米国以外の1ヶ国を指名したPCT国際出願の外国優先権利を主張  
し、更に優先権の主張に係わる基礎出願の出願日前の出願日を有する外国  
特許出願、又は発明者証出願或いはPCT国際出願を以下に明記する：

Prior foreign applications

先の外国出願

P11-162889

Japan

09/June/1999

(Number)

(Country)

(Day/Month/Year Filed)

(番号)

(国名)

(出願の年月日)

P11-176968

Japan

23/June/1999

(Number)

(Country)

(Day/Month/Year Filed)

(番号)

(国名)

(出願の年月日)

(Number)

(Country)

(Day/Month/Year Filed)

(番号)

(国名)

(出願の年月日)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated  
below next to my name.

I believe I am the original, first and sole inventor (if only one name is  
listed below) or an original, first and joint inventor (if plural names  
are listed below) of the subject matter which is claimed and for  
which a patent is sought on the invention entitled

THREE-DIMENSIONAL IMAGE CAPTURING DEVICE

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as

Application No. \_\_\_\_\_

and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of  
the above identified specification, including the claims, as amended  
by any amendment referred to above.

I acknowledge the duty to disclose information which is material to  
the examination of this application in accordance with Title 37, Code  
of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States  
Code §119(a-d) or §365(b) of any foreign application(s) for patent  
or inventor's certificate, or §365(a) of any PCT international  
application which designated at least one country other than the  
United States of America, listed below and have also identified  
below, by checking the "No" box, any foreign application for patent  
or inventor's certificate, or of any PCT international application having  
a filing date before that of the application on which priority is claimed:

Priority claimed

優先権の主張

☒ ☐

Yes No

あり なし

☒ ☐

Yes No

あり なし

☐ ☐

Yes No

あり なし

# Japanese Language Utility or Design Patent Application Declaration

☐ その他の外国特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto.

私は、合衆国法典第35部第119条(e)項に基づく、下記の合衆国仮特許出願の利益を主張する。

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

(Number)  
(番号)

(Day/Month/Year Filed)  
出願の年月日

(Number)  
(番号)

(Day/Month/Year Filed)  
出願の年月日

(Number)  
(番号)

(Day/Month/Year Filed)  
出願の年月日

☐ その他の合衆国仮特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

私は、合衆国法典第35部第120条に基づく下記の合衆国特許出願、又は第365条(c)項に基づく合衆国を指名したPCT国際出願の利益を主張し、本願の請求の範囲各項に記載の主題が合衆国法典第35部第112条第1項規定の様様で、先の合衆国特許出願又はPCT国際出願に開示されていない限度において、先の出願の出願日と本願の国内出願日又はPCT国際出願日の間に有効となった連邦規則法典第37部第1章第56条に記載の特許要件に所要の情報を開示すべき義務を有することを認める。

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application No.)  
(出願番号)

(Day/Month/Year Filed)  
(出願の年月日)

(現況)  
(特許済み、係属中 放棄済み)

(Status)  
(patented, pending, abandoned)

(Application No.)  
(出願番号)

(Day/Month/Year Filed)  
(出願の年月日)

(現況)  
(特許済み、係属中 放棄済み)

(Status)  
(patented, pending, abandoned)

☐ その他の合衆国又は国際特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional U.S. or international application numbers are listed on a supplemental priority sheet attached hereto.

私は、ここに自己の知識にもとずいて行った陳述がすべて真実であり、自己の有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、合衆国法典第18部第1001条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽による陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以上の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

私、下記署名者は、ここに記載の米国弁護士または代理人に本出願に関し特許商標庁にて取られるいかなる行為に関して、同米国弁護士又は代理人が、私に直接連絡なしに私の外国弁護士或いは法人代表者からの指示を受け取り、それに従うようここに委任する。この指示を出す者が変更の場合には、ここに記載の米国弁護士又は代理人にその旨通知される。

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from either his foreign patent agent or corporate representative, if any, as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

## Japanese Language Utility or Design Patent Application Declaration

委任状： 私は、下記発明者として、下記に明記された顧客番号を伴う以下の弁護士又は、代理人をここに選任し、本順の手続きを遂行すること並びにこれに関する一切の行為を特許商標庁に対して行うことを委任する。そして全ての通信はこの顧客番号宛に発送される。

顧客番号 7055

現在選任された弁護士は下記の通りである。

Neil F. Greenblum  
Bruce H. Bernstein  
Roger P. Glass  
James L. Rowland  
Arnold Turk

POWER OF ATTORNEY: As a named inventor, I hereby appoint the attorney(s) and/or agent(s) associated with the Customer Number provided below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number:

**CUSTOMER NUMBER 7055**

The appointed attorneys presently include:

Reg. No. 28,394  
Reg. No. 29,027  
Reg. No. 30,841  
Reg. No. 32,674  
Reg. No. 33,094

Address: **GREENBLUM & BERNSTEIN, P.L.C.**

1941 ROLAND CLARKE PLACE  
RESTON, VA 20191

直接電話連絡先：(名称および電話番号)

Direct Telephone Calls to: (name and telephone number)

**GREENBLUM & BERNSTEIN, P.L.C.**

(703) 716-1191

唯一のまたは第一の発明者の氏名	Full name of sole or first inventor Nobuhiro TANI
同発明者の署名	Inventor's signature <i>Nobuhiro Tani</i>
日付	Date <i>June 2, 2000</i>
住所	Residence Tokyo, Japan
国籍	Citizenship Japan
郵便の宛先	Post Office Address c/o ASAHI KOGAKU KOGYO KABUSHIKI KAISHA 36-9, Maenochō 2-chōme, Itabashi-ku, Tokyo, Japan
第2の共同発明者の氏名(該当する場合)	Full name of second joint inventor, if any
同第2共同発明者の署名	Second Inventor's signature
日付	Date
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address

(第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)